



AllView  
PolyResin Shutters

ShutterSMART  
PolyClad Wood Shutters

Miramonte  
Painted Wood Shutters

Miramonte Premier  
Stained Wood Shutters



Furniture Quality  
Triple-Dowel Joints



Polyclad Components  
Resemble Milled Wood



Aluminum  
Reinforced Louvers



Twist Lock  
Tilt Rod Design



Maintenance Free  
Polyclad Hardwood  
Construction

Window Size  
Reference & Price Guide  
2024



## THE INTELLIGENT CHOICE

### **Award Winning Polyclad Hardwood Shutter Now Featuring SolidCore Louvers**

ShutterSMART's Award Winning Polyclad Hard Wood construction delivers the only shutter with a durable and low maintenance polyresin clad over a solid wood core. ThermaCore cellular insulating Louvers feature Twist lock hooks and SolidCore traditional stapled Louvers. ShutterSMART's hardwood construction delivers the strength and look of a classic wood shutter giving you the edge to separate yourself from your competition and sell more. Thermacore also offers an Energy Guard feature.

### **Choices of Polyclad Hardwood, PolyResin, Painted Wood and Stained Wood Shutters with Arches and Custom Color Matches**

ShutterSMART's North American Factory provides you with a product line to meet all of your customers shutter needs. Our Products include AllView PolyResin Shutters, ShutterSMART ThermaCore and SolidCore Polyclad Wood Shutters, Miramonte Painted Wood Shutters, Miramonte Premier Stain Wood Shutters and Arches that match every one of our shutter styles.

### **Quick Ship**

ShutterSMART's Polyclad Hardwood ThermaCore and AllView PolyResin Shutters ship in 5-7\* working days and Miramonte Painted Wood Shutters, ShutterSMART SolidCore Shutters ship in 10 working days. Miramonte Stained wood shutters ship in 15 working days. Every order is confirmed with a ready date within 24 hours of receipt so you know when your shutters will ship (\*all lead times are estimates and may vary).

### **Fast Install Features with Pre-Framed Shutters & Pre-Attached Catches**

For Fast installation, all our shutters come pre-hinged from the factory ready to be installed. We offer a Fast Install option where we pre attach the catches and predrill the frames for ***fast installation***. Installation is easy and can be done in less than 10 minutes an opening.

### **SmartView Tilter System**

ShutterSMART's latest addition is the SmartView tilter feature that delivers a rear full view hidden tilt bar in ShutterSMART. SmartView is designed to match the AllView Full View hidden tilter system with options like wide panels, arch tops and specialty shapes offered in ShutterSMART.

### **Service Commitment**

ShutterSMART's North American factory is designed so that we can respond to your needs quickly so you can service your customers. Common dealer challenges like mismeasures, damages, design issues can quickly be handled and resolved. We can ship out any parts you need or remake complete shutters right from our local factory. If a repair is needed, you can send the shutters back. We can fix it and turn it around within days not months. That's our service commitment to you so you can focus on selling more shutters.

### **Marketing Programs, Comprehensive Selling Tools, and an Online Business System**

We've put together high-powered marketing and selling tools so you can spend your time closing sales. We offer consumer advertising programs, sample bags, videos, catalogs, and the most comprehensive selling tools in the industry. Plus, we offer a complete online ordering systems that makes placing orders and managing your shutter business simple. Please visit our website, [www.shuttersmart.com](http://www.shuttersmart.com).



Dear Valued Customer,

Thank you for choosing ShutterSMART. This manual was designed to help you get started selling shutters right away. Our North American Factory is designed to provide you high quality shutters quickly and affordable prices. We offer a complete line of Poly and Wood Shutters designed to fit all of your customers needs.

The manual is divided into 8 sections: Product Summary, Ordering, Pricing, Measuring, Designing Shutters, Specifications & Limitations, Arches and Installations. Please take some time to review these sections and then use the manual as a desktop reference to handle any shutter situations that may arise. If you have any unanswered shutter questions, just call us at **800-737-4569**, fax us at 323-727-6891 or email us at [dealersupport@uspolymersinc.com](mailto:dealersupport@uspolymersinc.com). Our shutter experts are on standby waiting to answer all your questions.

You can also visit our website at [www.shuttersmart.com](http://www.shuttersmart.com). Login to the dealer section and you will find our online business system to place and track orders online, the most recent versions of our shutter manuals, downloadable order forms, installation training videos and much more. Ask your sales or customer service representative for your username and password to log in.

For new customers, we provide a FREE online training course. The training course is made of seven three-minute videos and will teach you what you need to know to become comfortable with shutters.

Thank you for choosing ShutterSMART. We're excited to have you as a ShutterSMART dealer.

Sincerely,

*Viken Ohanesian*

Viken Ohanesian  
President  
ShutterSMART  
A division of US Polymers Inc

**Visit [www.Shuttersmart.com](http://www.Shuttersmart.com) and login into the Dealer Section for  
Our Online Business System, Our Online Training Seminars and  
Sales and Marketing Resources!**



## Table of Contents

<b>PRODUCT SUMMARY</b>	<b>1</b>
<b>ORDERING/ORDER FORMS</b>	<b>6</b>
<b>PRICING</b>	<b>20</b>
<b>MEASURING</b>	<b>23</b>
<b>DESIGNING SHUTTERS</b>	<b>26</b>
<b>SPECIFICATIONS &amp; LIMITATIONS</b>	<b>37</b>
<b>ARCHES</b>	<b>40</b>
<b>INSTALLATIONS</b>	<b>43</b>
<b>PROBLEM RESOLUTION FORM</b>	<b>45</b>
<b>COMPANY POLICIES</b>	<b>47</b>
<b>WARRANTY</b>	<b>49</b>

## PRODUCT SUMMARY

### Shutter Terminology


To help design shutters properly, let's first learn some shutter basics.

#### Panels

- Louvers
- Rails (top, bottom and dividing)
- Tilt Rod
- Hinges

#### Frames

- Vertical frame legs
- Horizontal frame rails

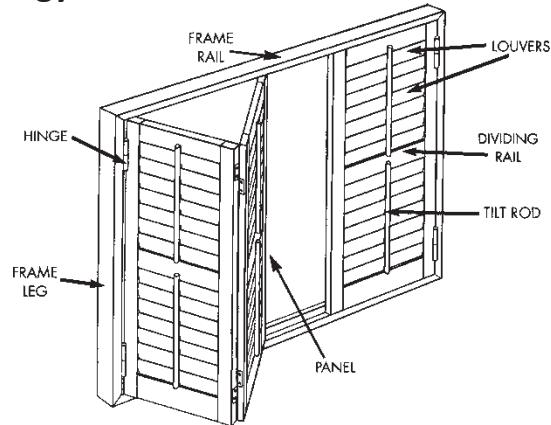

### Shutter Products

**ShutterSMART Polyclad Hardwood Shutters** are built with a solid hardwood core clad with a poly surface. The solid wood core delivers superior panel strength while the polyclad surface is durable, easy to maintain and eco-friendly. The proprietary WoodTex finish captures the look and feel of a classic painted wood shutter, making ShutterSMART the most intelligent choice in Shutters today. The louvers are available in the **SolidCore** design or the insulating **ThermaCore** design. Energy Guard is available with ThermaCore.

**AllView PolyResin Shutters** are built with PolyResin using our proprietary WoodTex™ finish that gives the soft look and feel of painted wood. The Polyresin surface is easy to clean, low maintenance and much more durable than wood. The Poly construction has an open core reinforced with solid corner joint blocks, featuring superior insulation properties that provide big energy savings!

**MiraMonte Painted Wood Shutters** are hand built with a hardwood core then painted in an array of colors or custom matched with a baked-on finishing process. MiraMonte brings you a high-quality wood shutter built with old world craftsmanship.

**MiraMonte Premier Stained Wood Shutters** are offered in custom stains matched to any color you choose. The Premier line brings you a world of high-end custom colors, stains, and wood shutter craftsmanship.




## Features and Options

	Poly Shutters		Wood Shutters	
	AllView Poly Resin	ShutterSMART Polyclad Hardwood	MiraMonte Painted Wood	MiraMonte Premier Stained Wood
<b>Construction and Key Feature</b>	Durable and Low Maintenance PolyResin Materials featuring our WoodTex Finish that Captures the look and feel of Real Wood.	Hardwood Core Clad in a durable polyresin. Polyclad Hardwood is the Most Durable and Maintenance Free Shutters that Captures the Look and Feel of Real Wood Shutters WoodTex Finish. Energy Guard available.	Hardwood Shutters painted in an array of colors or custom matched with a baked-on finishing process.	100% North American Basswood Shutters. Stained in standard or Custom match Stains and built with Old World Craftsmanship.
<b>Louver Sizes</b>	3", 4" ThermaCore	3", 4" ThermaCore 3 1/2", 4 1/2" SolidCore	2 1/2", 3 1/2", 4 1/2"	2 1/2", 3 1/2", 4 1/2"
<b>Colors</b>	White, Swiss Coffee	ThermaCore & SolidCore Colors -White, Swiss Coffee, Off White*, Pearl*, Eider White*, Agreeable Gray*	White, Bright White, High Reflective White, Eider White, Extra White, Pure White, Antique White, Swiss Coffee, Off White, Pearl, Vanilla Bean, Greek Villa, Alabaster, Agreeable Gray, Morris Room Gray, Mindful Gray, Evergreen Fog, Folkstone. Primed and *Custom Match Colors take 1 Addit Week + Surcharge. (Min order 150 Sq.F)	Honey Maple, Walnut, Golden Oak, Teak, Pecan, Mahogany, Natural, Rustic Gray, Brazilnut, New Ebony and Gray Birch.  *Custom Match Stains take Additional 1 Week + Surcharge (Min order 150 Sq.Ft.)
<b>Louver Shapes</b>	Elliptical	Elliptical	Elliptical	Elliptical
<b>Hinges</b>	Powder coated colors: White, Off White, Brass Plated, Stainless Steel	Powder coated colors: White, Off White, Almond, Nickel Satin, Antique Brass, Black, Brass Plated, Oil Rubbed Bronze, Stainless Steel	Powder coated colors: White, Off White, Almond, Nickel Satin, Antique Brass, Oil Rubbed Bronze, Black, Brass Plated, Stainless Steel	Powder coated colors: Brass Plated, Antique Brass, Oil Rubbed Bronze, Black, Brass Plated, Stainless Steel, Nickel Satin
<b>Shutter Types</b>	Standard Folding, Bypass Slider, Bypass Slider w/Bottom Track. T-Post, French Door, Track Shutter.	Standard Folding, Bypass Slider, Bypass Slider w/Bottom Track. Dbl. Bypass, Bifold Track, T-Post, Double Hung, French Door, FD Cutout Sunburst Arch, Arch Top Shutters	Standard Folding, Bypass Slider, Bypass Slider w/Bottom Track. Dbl. Bypass, Bifold Track, T-Post, Double Hung, French Door, FD Cutout, Sunburst Arch, Arch Top Shutters.	Standard Folding, Bypass Slider, Bypass Slider w/Bottom Track. Dbl. Bypass, Bifold Track, T-Post, Double Hung, French Door, FD Cutout, Arch Top Shutters.
<b>Frame Types</b>	Standard L, Flat ST, Flat Z, Designer, Z, Trim Z, Elegance, Hanging Strip, Slimline, Extended L, Extended Frame	Standard L, Flat ST, Flat Z, Designer, Z, Trim Z, Elegance, Hanging Strip, Slimline, Extended L, Extended Frame	Standard L, Flat ST, Flat Z, Designer, Z, Deco Z, Elegance, Hanging Strip, Slimline, Extended L, Extended	Standard L, Flat ST, Flat Z, Designer, Z, Deco Z, Elegance, Hanging Strip, Slimline, Extended
<b>Maximums</b>	1 panel 27" + Frame 2 panel LR 54" + Frame 2L or 2R 44" + Frame 2L2R 88" + Frame Height: Single Panel 86" + Frame Height: Bifold Panel 72" + Frame.	Thermacore - 1 panel 36" + frame 2 panel LR 72" + Frame 2L or 2R 52" + Frame 2L2R 104" + Frame SolidCore- 1 panel 34" + Frame 2 panel 68" + Frame 2L or 2R 48" + Frame 2L2R 96" + Frame Height: 114" + Frame	1 panel 36" + Frame 2 panel LR 72" + Frame 2L or 2R 52" + Frame 2L2R 104" + Frame Height: 114" + Frame	1 panel 36" + Frame 2 panel LR 72" + Frame 2L or 2R 52" + Frame 2L2R 104" + Frame Height: 114" + Frame

## Basic Shutters


### Standard Folding Shutters

Standard Folding Shutters consist of one or more panels hinged on a frame. These can be single panels or bi fold panels hinged to each other. This is the most common type of shutter available. For an extensive list of applications covered by Standard folding shutters, refer to the section on selecting shutter types in the design section of this manual.

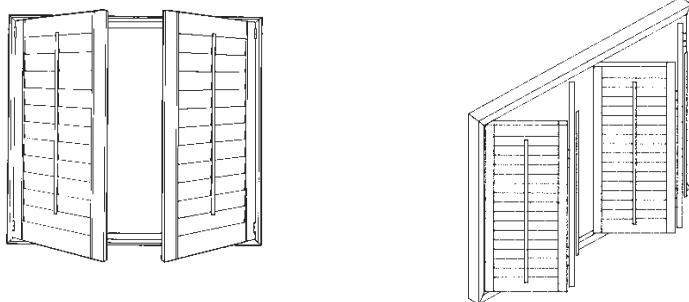


### Bypass Sliding Shutters

Bypass sliding shutters are ideal for sliding glass doors or windows where space in front of the shutter is not enough for the panels to swing outward. The panels slide on a track system similar to closet mirror doors.

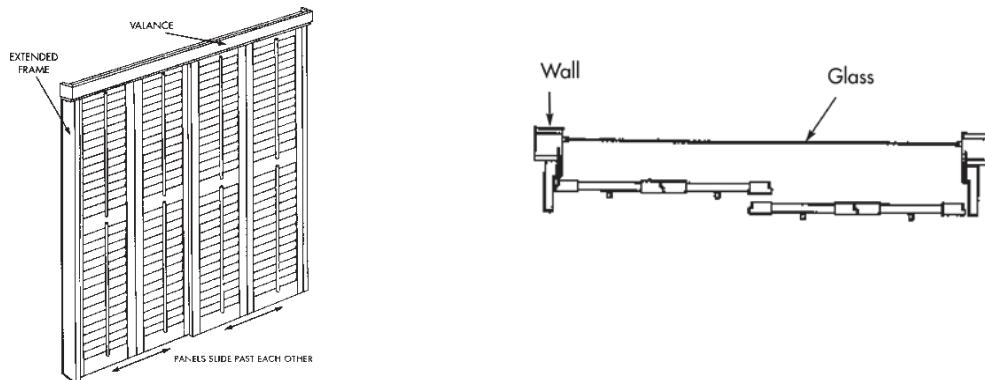

### Bi Fold Sliding Shutters


Bi Fold shutters are used for sliding glass doors. The panels next to the vertical frame legs are mounted on pivots while additional panels are hinged and guided by carriers running in an overhead track. The track gives additional support for shutters with large panels. Bi Fold shutters must have even number panels on any side.

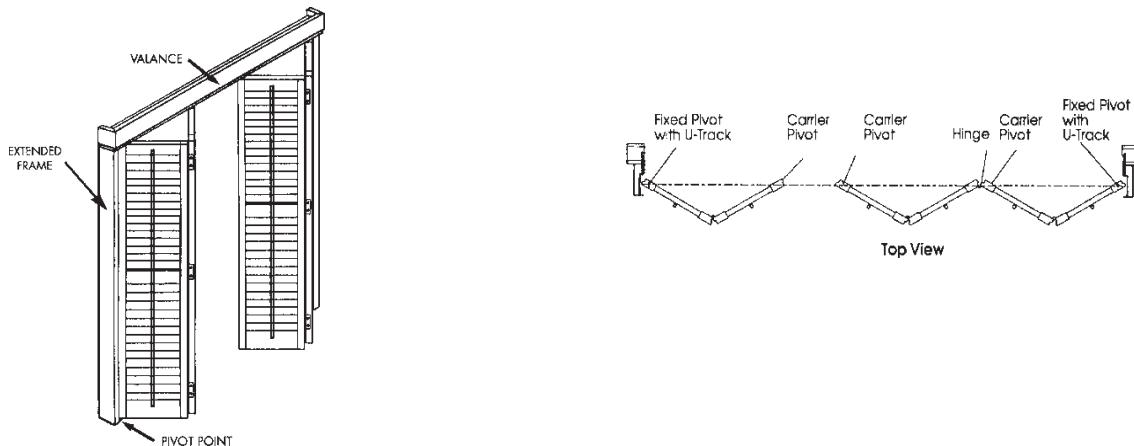


\*See the designing shutters section for more design options.

## ShutterSMART & AllView Frames


### Outside Mount Frames

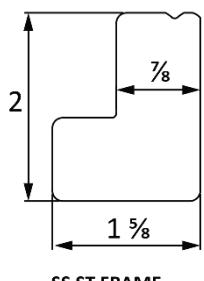


SS ST FRAME

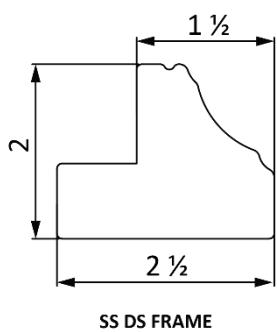


SS DS FRAME



SS HANGING STRIP

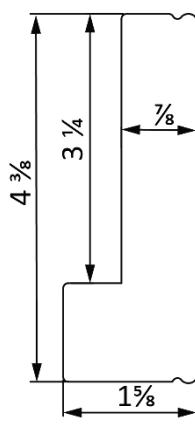


SS EX FRAME

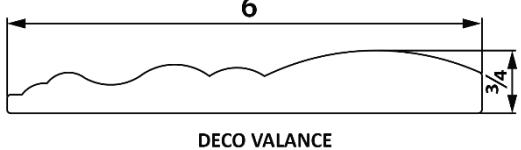


DECO VALANCE


### Inside Mount Frames

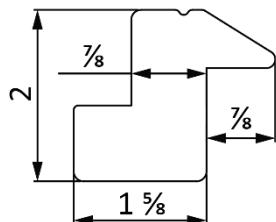


SS Z FRAME

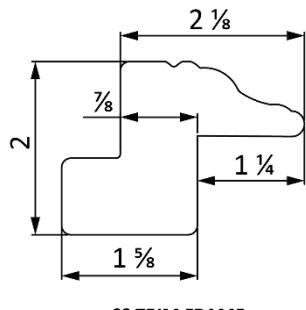


SS TRIM FRAME

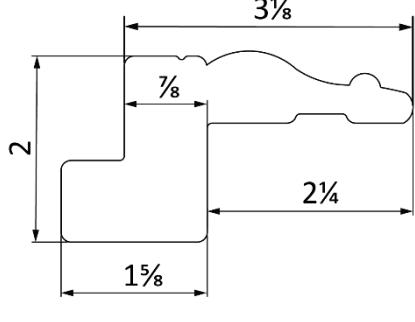

SS EL FRAME

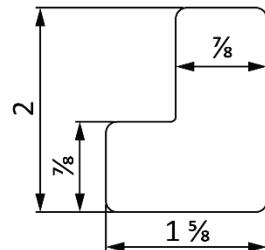


SS FLAT ST FRAME

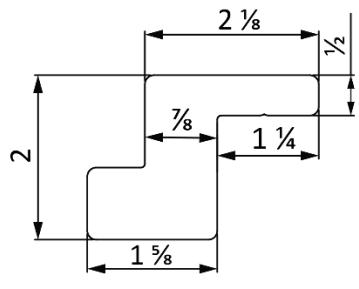


SS FLAT Z FRAME


### Other Frames

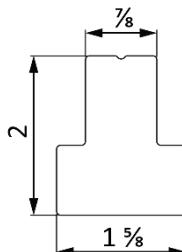


SS T POST

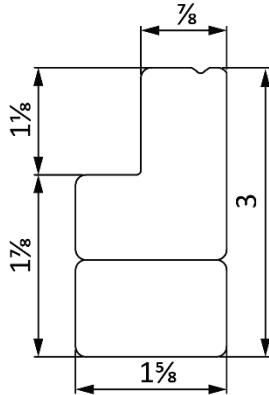


SS ST EXTENDED FRAME




SS SL FRAME



SS LIGHT STOP




SS FRAME SPACER

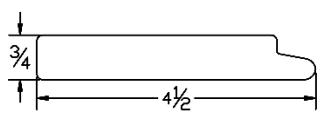


REGULAR VALANCE

## MiraMonte & MiraMonte Premier Frames


### Outside Mount Frames




MM ST FRAME

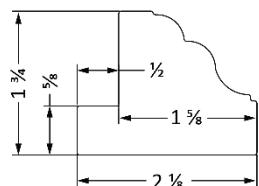


MM DS FRAME



MM HANGING STRIP

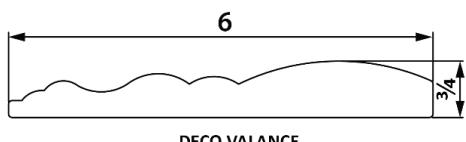


DECO VALANCE

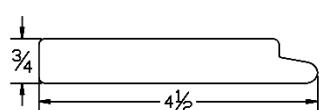


REGULAR VALANCE


### Inside Mount Frames

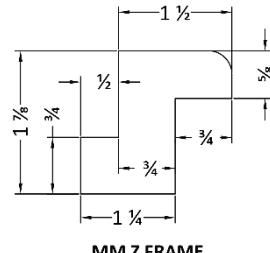

MM Z FRAME

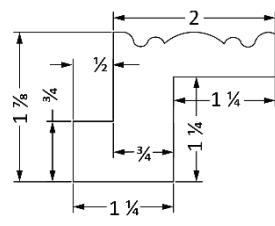


MM DZ FRAME

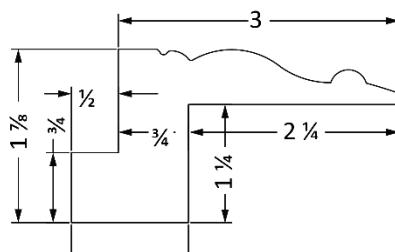


MM EL FRAME


### Other Frames

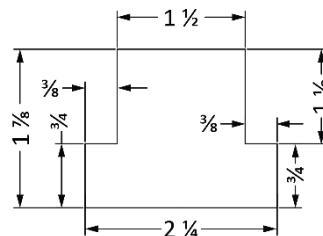


MM T POST




MM DECO SILL FRAME




MM SL FRAME




MM FLAT ST FRAME

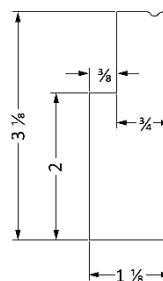

MM SX FRAME

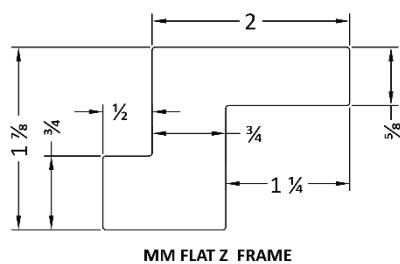

MM FLAT Z FRAME



MM LIGHT STOP



## ORDERING

### Online Ordering

Orders can now be placed online at [www.shuttersmart.com](http://www.shuttersmart.com) in the Dealer Resource section. There are many benefits to placing orders online including immediate cut sheet verification to ensure that shutters can be built as requested, immediate order submission cutting down production lead times and immediate pricing confirmation. For instructions on how to order online please request our Online ordering instructions from your Sales Rep or Customer Service at [dealersupport@uspolymersinc.com](mailto:dealersupport@uspolymersinc.com).

### Online Business System

The online ordering system is a complete Business Management System as well, giving you the following benefits:

- Track all your open orders online
- Quote and save orders before submitting
- Immediate ship date confirmations
- Immediately know your costs
- Speed up Production Time
- Cut down on costly Errors

Visit [www.shuttersmart.com](http://www.shuttersmart.com), login in as a dealer and start managing your shutter business today. For a full set of instructions and your passwords to start using our system, contact your sales representative.

### Order Forms

Order Forms can be found in this manual; also available for download at [www.shuttersmart.com](http://www.shuttersmart.com), Dealers Section. Completed order forms can be emailed to [orders@uspolymersinc.com](mailto:orders@uspolymersinc.com) or faxed to (323) 727-6891

Shutter orders can be placed online at [www.shuttersmart.com](http://www.shuttersmart.com) in the dealer login section. Order forms can be emailed to our order desk [orders@uspolymersinc.com](mailto:orders@uspolymersinc.com) or faxed in (323) 727-6891.



1. Colors	Standard Colors W - White S - Swiss	Custom Colors N/A			
2. Louver Size	3" - 4"				
3. Mount Type	W - Inside Mount OUT - Outside Mount				
4. Shutter Type	SF - Standard Folding BP - Bypass Slider TP - T-Post DH - Double Hung FD - French Door TK - Track				
5. Frame Type	ST - Std L Frm FLST - Flat Std L Frm DS - Designer Frame TK - Track SL - Slimline Frame HS - Hanging Strip Custom Door	Inside Mount: TR - Trim Z Frame EL - Elegance Z Frame ZF - Z Frame FLZ - Flat Z Frame ST - Std L Frame FLST - Flat Std L Frame HS - Hanging Strip TK - Track	French Door: SL - Slimline Frame ST - Standard Frame FLST - Flat Standard Frame Cutout: N/A	Sliders: EX - Extended Frame ED - Extended Frame with Deco Valance TK - Track	
6. No of Frame Sides	4W 45 - 4-Sided Frame for window (outside or inside mounts) 3M 3-Sided Frame for windows (used for windows with crank on bottom or with Sill) 3D 3-Sided Frame for doors 2W 2-Sided Frame for windows (used for café style shutters) CW Custom Frame configuration in L & Z frames. Draw in special instructions. CD Custom Door	(4) 4W 45 - 4-Sided Frame for Sill (Sill Plate on btm) 3M 3-Sided Frame for windows (used for windows with crank on bottom or with Sill) 3D 3-Sided Frame for doors 2W 2-Sided Frame for windows (used for café style shutters) CW Custom Frame configuration in L & Z frames. Draw in special instructions. CD Custom Door	(1) 4W 45 - 4-Sided Frame for window (outside or inside mounts) 3M 3-Sided Frame for windows (used for windows with crank on bottom or with Sill) 3D 3-Sided Frame for doors 2W 2-Sided Frame for windows (used for café style shutters) CW Custom Frame configuration in L & Z frames. Draw in special instructions. CD Custom Door	(1) 4W 45 - 4-Sided Frame for Sill (Sill Plate on btm) 3M 3-Sided Frame for windows (used for windows with crank on bottom or with Sill) 3D 3-Sided Frame for doors 2W 2-Sided Frame for windows (used for café style shutters) CW Custom Frame configuration in L & Z frames. Draw in special instructions. CD Custom Door	
7. Site	Provide width and height and indicate whether they are window opening size or frame to frame size. Wide Openings: use T-Posts. Ensure mounting clearances around window or inside window lamb for proper installation of frame.	Provide width and height and indicate whether they are window opening size or frame to frame size. Wide Openings: use T-Posts. Ensure mounting clearances around window or inside window lamb for proper installation of frame.	Provide width and height and indicate whether they are window opening size or frame to frame size. Wide Openings: use T-Posts. Ensure mounting clearances around window or inside window lamb for proper installation of frame.	Provide width and height and indicate whether they are window opening size or frame to frame size. Wide Openings: use T-Posts. Ensure mounting clearances around window or inside window lamb for proper installation of frame.	
8. Panel Configuration	Note # of panels folding Left (L) and Right (R) based on the opening width and folding direction desired.	(1) Single Panel L or R 27" + Frame	(2) 2 Panels LR 54" + Frame	(3) Bi-Fold LL or RR 44" + Frame	(4) 4 Panels LLRR 88" + Frame
9. Divider Rail or Split Tilt Tilter	Indicate if placement number(s) in column 10 are for Divider Rail or for Tilt Rod Split.				
10. Divider Rail(s) or Split Tilt Rod Position(s)	Shutters over 62" tall must have 1 Divider Rail or Tilt Rod Split. Track Shutters do not have side frames, and will overlap wall. Track Shutters over 62" require Split Tilt or Divider Rail. C (center) = Split point will be located to evenly divide this panel. Position = Split point will be placed as close as possible to indicated height (from bottom of shutter to mid-point of louver).				

11. Add Front Tilt Rod	AllView shutters are always built with the AllView Rear Tilter to give the maximum view possible. This is a standard feature of the shutter at no extra charge. If you would like to add a tilt rod in the front, mark (Y) Yes in this box.		
12. Frame Build Out	Forward when louvers need clearance to operate. i.e. mounting beyond molding, to clear door handles or mounting a standard shutter on sliding door. For Track Shutters, an extended bracket is supplied.		
13. Hinge Color	Shutter Color (1) W - White S - Swiss Coffee	Default (DEF) Hinge Color (14) W - White O - Off White	Custom Hinge Color (14) BP - Brass Plated SS - Stainless Steel
14. Mount Magnets	Y or N		
15. Corner Group	For Corner windows, a pair of shutters can be marked as Corner Group Left and Right. Order as window size and the factory will make all the deductions and frame design needed.		
16. T-POST Location	Distance from left point of given size to center of T-Post1 & T-Post2. Draw folding direction of T-Post panels below.		
17. Window Side by Side	Window Size: From Left of window to Center of T-Post. Frame Size: - From Left Frame to Center of T-Post. To ensure rails are the same size, make sure heights are the same for all next to each other shutters.		

### AllView Pricing (All pricing is based on outside of frame to outside of frame sizes)

I. Ordering By Shutter Frame to Shutter Frame Size:	Give outside of frame to outside of frame size No Frame, Panels only	Width Width Width	x Height x Height x Height	/144 /144 /144	x S/soft x S/soft x S/soft
<b>II. Ordering By Window Size:</b>					
Outside Mount Frames -	Standard L Frame, Flat Standard Frame, Extended Frame	4 Sided 3 Sided	Width +4" Width +4"	x Height +4" x Height +2"	/144 /144 /144
Designer Frame		4 Sided 3 Sided	Width +5" Width +5"	x Height +5" x Height +2.5"	/144 /144 /144
Hanging Strip (Strip behind panel on wrap around hinge)		4 Sided 3 Sided	Width +3" Width +3"	x Height +3" x Height +1.5"	/144 /144 /144
Slimline Frame (French Door Only)		4 Sided 3 Sided 2 Sided	Width +2.5" Width +1.5" Width +1.5"	x Height +2.5" x Height +1.5" x Height +1.5"	/144 /144 /144
Inside Mount Frames -	Elegance Z Frame	4 Sided 3 Sided 2 Sided	Width +4" Width +4" Width +4"	x Height +4" x Height +2" x Height +2"	/144 /144 /144
	Trim Z Frame and Flat Z	4 Sided 3 Sided 2 Sided	Width +3" Width +3" Width +3"	x Height +3" x Height +1.5" x Height +1.5"	/144 /144 /144
Standard L Frame, Flat Standard Frame	4,3,2 Sided	Width	x Height	/144	x S/soft
Hanging Strip (Strip behind panel on wrap around hinge)					

BILL TO:		SHIP TO:	
Ph:	Email:	Ph:	
<b>Shutter smart</b> <input type="checkbox"/> Thermacore <input type="checkbox"/> Solidcore		<b>Shutter smart</b> <input type="checkbox"/> Thermacore <input type="checkbox"/> Solidcore	
<b>Window Size Order Form</b> Tel: 800.737.4569 Fax: 323.727.6891 Email: orders@uspolymersinc.com			
<b>P.O.# / SIDE MARK</b> Date: _____			
<b>CUSTOMER SIGNATURE</b>		<b>P.O.# / SIDE MARK</b> Date: _____	
Qty:	Room	1 Color	2 Louver Size
		3 Tilt-Rod	4 Mount Type
		5 Shutter Type	6 Frame Type
		7 No of Sides	8 W - Window Size F - Frame to Frame
		9	No. of PANELS Folding Direction
		10	11 Dividing Rail(s) or Split Tit Rod Position(s)
		12	12 Frame Build-out 1"
		13	13 Astragal
		14	14 Hinge Color
		15	15 Mount Magnet
		16	16 Corner Group
		17	17 T-Post from Left to center of T-Post
		18	18 Window Side by Side
<b>Shutters are custom made. This order is not subject to cancellation or change.</b>			
Standard Colors	Thermacore 3" (T) 4" (T)	F IN OUT	SF 4W BF 4S BP 3W BT 3D
Specialty Colors*	Thermacore 3 1/2" (S) 4 1/2" (S)	B Back-Offset	ST FLST DS TR TP HS DH EX ZF CW FD F12 FC EL AR SL ARTP ED DB STX
Specialty Colors*	Solidcore 3 1/2" (S) 4 1/2" (S)	RFV Hidden-Tilt	4A 4AS NF-HG NF-NHG NF
Specialty Colors*	Elder White* AB-Argylete Gray*		

1. Colors	Standard Colors W -White S -Swiss Coffee	Specialty Colors* (1 week longer lead time + surcharge) O -Off White* PW -Pearl* EW -Elder White* AG -Agreeable Gray* EV -Elder White*
2. Louver Size	ThermoCore Louver (T) 3" or 4"	SolidCore Louver (S) 3 ½" or 4 ½"
3. Tilt Rod	Front -Front Tilt	Back -Tilt In Back - (Offset)
4. Mount Type	IN -Inside Mount	OUT -Outside Mount
5. Shutter Type	SF -Standard Folding BF -Bi-Fold Slider BP -Bypass with Bottom Track	DH -Double Hinge FD -French Door AR -Arch Top Shutter (Draw diagram) TP -T-Post
6. Frame Type	ST -Standard L Frame FLST -Flat Standard L Frame DF -Designer Frame HS -Hanging Strip EX -Extended Frame STX -Extended Extended Frame SL -Slimline Frame	DF -Double Bypass DB -Double T-Post FC -French Door Cutout (Refer to manual for more details)
7. No of Frame Sides	4W -4 Sided Frame for window (outside or inside mounts) 4AS -4-Sided Frame for Sill (Top & Bottom Sill Plate) 3W -3-Sided Frame for windows (used for windows with crank on bottom or with Sill) 3D -3-Sided Frame for doors 4A -4-Sided Flat Top for arch	2F -2 Frame D2 -Deco Z Frame EL -Elegance Z Frame ST -Standard L Frame HS -Hanging Strip NF -No Frame (Net Panels)
8. Size	2W -2-Sided Frame (For cafe style shutters) CW -Custom Frame configuration in any L & Z frames. Use with arches. Draw in <a href="#">Special Instructions section</a> . NF-HG -No frame with hinges. Panels Only with attached hinges (Use Frame Size Measurement Option) NF-NHG -No frame, no hinges. Panels Only no hinges attached (Use Frame Size Measurement Option)	Provide width and height and indicate whether frame is around window or inside window (amb for proper installation of wide openings use T-Posts). Ensure mounting clearances around window or inside window (amb for proper installation of frame). * Max sizes: See reference guide for details
9. Panel Configuration	Note # of panels folding Left (L) and Right (R) based on the opening width and folding direction desired.	Maximum Panel Widths: (1) Single Panel L or R 36" + Frame (2) 2 Panels L/R 72" + Frame (3) Bi-Fold L/L or R/R 52" + Frame (4) 4 Panels L/L/R/R 104" + Frame
10. Divider Rail or Split Tilt Rod	Indicate if Placement number(s) in column 10 are for (D) Divider Rail or for (S) Split Tilt Rod.	Maximum Panel Widths for SolidCore Shutters (3 1/2" and 4 1/2" Louvers): Single Panel L or R 34" + Frame 2 Panels L/R 68" + frame 44" + frame 4Panels L/L/R/R 388" + Frame

11. Divider Rail(s) or Split Tilt Rod Positions(s)

If no height is indicated, split point will be located to evenly divide the panel.

Split point will be placed as close to indicated height (from bottom of window to mid-point of louver).

C (Center) - If no height is indicated, split point will be located to evenly divide the panel.

Used to project shutters 1" forward when louvers need clearance to operate, i.e. mounting beyond molding, to clear door handles or mounting a standard shutter on sliding door.

13. Astragal

14. Hinge Color

Shutter Color (1)

Color (14)

Custom Hinge Color (14)

W-White

W-White

S - Swiss Coffee

O - Off White

PW - Pearl

EW - Elder White

Al - Almond

EW - Elder White

AG - Agreeable

EW - Elder White

NS - Nickel Satin

Gray

AB - Antique Brass

OB - Oil Rubbed Bronze

BL - Black

BP - Brass Plated

SS - Stainless Steel

15. Mount Magnets

Upgraded recessed magnets are pre-mounted onto shutters if marked (Y) Yes in this box.

16. Corner Group

For Corner windows, a pair of shutters can be marked as Corner Group Left and Right.

Order as window size and the factory will make all the deductions and frame configurations needed.

17. T-POST Location

Distance from left point of given size to center of T-Post panels below.

Window Size - From Left of window to Center of T-Post.

Frame Size - From Left Frame to Center of T-Post.

18. Window Side by Side

To ensure rails are the same size, make sure heights are the same for all next to each other shutters.

#### ShutterSMART Pricing (All pricing is based on outside of frame to outside of frame size)

Width	x Height	Width	x Height	Width	x Height	Width	x Height
4 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
3 Sided	Width + 3"	Width + 4"	Width + 4"	3 Sided	Width + 5"	Width + 5"	Width + 5"
4 Sided	Width + 5"	Width + 5"	Width + 5"	3 Sided	Width + 2.5"	Width + 2.5"	Width + 2.5"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 2.5"	Width + 2.5"	Width + 2.5"	4 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"
4 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"	4 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"
3 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"	4 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"
2 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"	4 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"
4 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 1.5"	Width + 1.5"	Width + 1.5"
4 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
3 Sided	Width + 4"	Width + 4"	Width + 4"	3 Sided	Width + 4"	Width + 4"	Width + 4"
2 Sided	Width + 4"	Width + 4"	Width + 4"	3 Sided	Width + 4"	Width + 4"	Width + 4"
4 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
3 Sided	Width + 4"	Width + 4"	Width + 4"	3 Sided	Width + 4"	Width + 4"	Width + 4"
4 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
3 Sided	Width + 4"	Width + 4"	Width + 4"	3 Sided	Width + 4"	Width + 4"	Width + 4"
4 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
3 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
2 Sided	Width + 4"	Width + 4"	Width + 4"	4 Sided	Width + 4"	Width + 4"	Width + 4"
4 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width + 3"
3 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
2 Sided	Width + 3"	Width + 3"	Width + 3"	3 Sided	Width + 3"	Width + 3"	Width + 3"
4 Sided	Width + 3"	Width + 3"	Width + 3"	4 Sided	Width + 3"	Width + 3"	Width

## BILL TO:

Ph:  
Email:**MIRAMONTE**  
PAINTED WOOD SHUTTERS

## SHIP TO:

Ph:

Shutters are custom made.  
This order is not subject to  
cancellation or change.

## CUSTOMER SIGNATURE

Tel: 800.737.4569 Fax: 323.727.6891 Email: [orders@uspolymersinc.com](mailto:orders@uspolymersinc.com)

## Window Size Order Form

Qty	Room	Color	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18	CUSTOMER SIGNATURE			No. of PANELS			Dividing Rail(s) or Split Tilt Rod Position(s)			Dividing Rail or Split Tilt			Frame Buildout 1"			Hinge Color			Mount Magnets			T-Post from Left to Center of T-Post			P.O.# / SIDE MARK:				
				1 Color	2 Louver Size	3 Tilt Rod Type	4 Mount Type	5 Shutter Type	6 Frame Type	7 No. of Frame Sides	8 W - Window Size	9 F - Frame to Frame Size	10 W	11 F	12 Width	13 Height	14 Left	15 Right	16 Y	17 Left	18 Right	19 Y	20 Left	21 Right	22 Y	23 Left	24 Right	25 Y	26 Left	27 Right	28 Y	29 Left
				W-White	2 1/2"	F	IN	SF	ST	4W	4S	4W	4S	4T	FLST	DS	3W	4A	4A	1	1	Y	DEF	Y	Y	Y	Y	Y	Y	Y	Y	Y
				BW-Bright White	2 1/2"	Front-Tilt	OUT	BF	BT	TP	TP	TP	TP	TP	TP	TP	TR	HS	HS	HS	2	2	Y	W	Y	Y	Y	Y	Y	Y	Y	Y
				HRW-High Reflective White	3 1/2"	Back-Offset	B	BF	BT	DH	DH	DH	DH	DH	DH	DH	FD	EX	EX	EX	3	3	Y	W	Y	Y	Y	Y	Y	Y	Y	Y
				EXW-Extra White	4 1/2"	Offset	B	BF	BT	DH	DH	DH	DH	DH	DH	DH	FC	AR	AR	AR	4A5	4A5	Y	W	Y	Y	Y	Y	Y	Y	Y	Y
				PRW-Pure White				RFV	Holster-Tilt	ARTP	ARTP	ARTP	ARTP	ARTP	ARTP	ARTP	DB	FLZ	FLZ	FLZ	EL	EL	Y	W	Y	Y	Y	Y	Y	Y	Y	Y
				AW-Antique White													DB	ED	ED	ED	STX	STX	Y	W	Y	Y	Y	Y	Y	Y	Y	Y
				S-Swiss Coffee																												
				O-Off White																												
				PWF-Pearl White																												
				VB-Vanilla Bean																												
				GV-Greek Villa																												
				AL-Alabaster																												
				EW-Elder White																												
				AG-Aqueous Gray																												
				MRG-Morris Room Gray																												
				MGS-Mindful Gray																												
				EF-Evergreen Fog																												
				FS-Folkstone																												
				P-Primed																												
				CP-Custom Paint																												

## SPECIAL INSTRUCTIONS

Line # <input type="text"/> T-Post - Draw Panels	Custom Frames - Specify Frames Line # <input type="text"/>	French Door Oval Cut Out Slim line & Standard L Frame Line # <input type="text"/>
Line # <input type="text"/> TPL <input type="checkbox"/> TPL	Line # <input type="text"/> CW <input type="checkbox"/> T <input type="checkbox"/> L <input type="checkbox"/> R <input type="checkbox"/> B	Line # <input type="text"/> %" Optional Offset <input type="checkbox"/> Cutout Center Height H= <input type="text"/>
Special Instructions:		Line # <input type="text"/> 10" <input type="checkbox"/> 12" <input type="checkbox"/> 14"
		Line # <input type="text"/> HL <input type="checkbox"/> HC <input type="checkbox"/> HR Arch Line # <input type="text"/> HL <input type="checkbox"/> HC <input type="checkbox"/> HR Arch Line # <input type="text"/> HL <input type="checkbox"/> HC <input type="checkbox"/> HR Arch Line # <input type="text"/> HL <input type="checkbox"/> HC <input type="checkbox"/> HR Arch Line # <input type="text"/> HL <input type="checkbox"/> HC <input type="checkbox"/> HR
		Note: Standard L Frame will have built in 7/8" back plate offset. Cutout Depth D = 4 1/2"





1. Colors	W - White PW - Bright White EXW - Extra White AW - Antique White	S - Swiss Pearl AG - Agreeable Gray HRW - High Reflective White O - Off White	PR - Primed AL - Alabaster MG - Mindful Gray EW - Elder White GV - Greek Villa	VB - Vanilla Bean CP - Custom Paint (Min order size-150 Sq. Ft.)	12. Frame Spacer 13. Astragal 14. Hinge Color	Used to project shutters 1" forward when louvers need clearance to operate. i.e. mounting beyond molding, to clear door handles or mounting a standard shutter on sliding door. Special Styles with Astragal where panels meet.
2. Louver Size	2 1/2" or 3 1/2" or 4 1/2"					
3. Tilt Rod	F - Tilt Rod in Front	B - Tilt in Back - (Offset)	RFV - Rear Full View - Hidden tilt.			
4. Mount Type	IN - Inside Mount	OUT - Outside Mount				
5. Shutter Type	SF - Standard Folding BF - Fold Slider BP - Bypass Slider TP - T-Post	DH - Double Hung FD - French Door AR - Arch Top Shutter (draw diagram)	ARTP - Arch Top T-Post FC - French Door Cutout (Refer to manual for more details.)	DB - Double Bypass for 2 1/2" and 3 1/2" louvers only		
6. Frame Type	ST - Standard L Frame: FLST - Flat Standard L Frame DF - Designer Frame HSD - Hanging Strip EX - Extended Frame SL - Slimline Frame	ZE - Z-Frame FLZ - Flat Z-Frame DZ - D-Frame EL - Elegant Z-Frame ST - Standard Z-Frame STX - Standard Extended Frame SL - Slimline Frame	French Door: SL - Slimline Frame ST - Standard Frame FLST - Flat Standard Frame STX - Standard Extended Frame	Sliders: EX - Extended Frame ED - Extended Frame with Deco Valance		
7. No of Frame Sides	4W - 4-Sided Frame for window (outside on inside mounts) 4S - 4-Sided Frame for Sill (Sill Plate or sill frame on bottom) 3W - 3-Sided Frame for windows (used for windows with crank on bottom or with sill) 3D - 3-Sided Frame for doors					
8. Size	4A - 4-Sided Flat Top for arch 2W - Custom 2-Sided Frame (for cafe style shutters)					
9. Panel Configuration	CW - Custom Frame configuration in any L & Z frames. Use with arches. Draw in Special Instructions section.					
10. Divider Rail or Split Tilt Rod	Indicate if Placement number(s) in column 10 are for (D) Divider Rail or for (S) Split Tilt Rod.					
11. Divider Rail(s) or Split Tilt Rod						
12. Frame	36" + Frame	(1) Single Panel L or R 36" + Frame	(2) 2 Panels LR 72" + Frame	(3) Bi-Fold L or RR 52" + Frame	(4) 4 Panels LRR 104" + Frame	
13. Astragal						
14. Hinge Color						
15. Mount Magnets						Standard Magnets are pre-mounted onto shutters if marked (Y) Yes in this box.
16. Corner Group						For Corner windows, a pair of shutters can be marked as Corner Group Left and Right. Order as window size and the factory will make all the deductions and frame configurations needed.
17. T-POST Location						Distance from left point of given size to center of T-Post1 & T-Post2. Draw folding direction of T-Post panels below.
18. Window Side by Side						Window Size - From Left of window to Center of T-Post. Frame Size - From Left Frame to Center of T-Post. Provide width and height and indicate whether they are Window opening size or Frame to Frame size. Wider Openings use T-Posts. Ensure mounting clearances are around window or inside window/amb for proper installation of frame. Note # of panels folding Left (L) and Right (R) based on the opening width and folding direction desired.
						Maximum Panel Widths: (1) Single Panel L or R (2) 2 Panels LR 36" + Frame (3) Bi-Fold L or RR 52" + Frame (4) 4 Panels LRR 104" + Frame



MIRAMONTE PREMIER 1. Colors	HM - Honey Maple WL - Walnut GO - Golden Oak TK - Teak PE - Pecan	MH - Mahogany NA - NATURAL RG - Rustic Gray BN - Brazil Nut NE - New Ebony	GB - Gray Birch GS - Custom Stain Match (min order size 150 sq ft)	12. Frame Spacer 13. Hinge Color 14. Mount Type	Used to project shutters 1" forward when louvers need clearance to operate. i.e. mounting beyond molding. to clear door handles or mounting a standard shutter on sliding door. Custom Hinge Color (14)
2. Louver Size	2 1/2" or 3 1/2" or 4 1/2"	B - Tilt in Back - (Offset) OUT - Outside Mount	RFV - Rear Full View - Hidden Tilt	15. Hinge Color 16. Frame Type	Color (14) Default Hinge (DEF) Color (14)
3. Tilt Rod	F - Tilt Rod in Front	DH - Double Hung FD - Double French Door AR - Arch Top Shutter (Draw diagram)	ARTP-Arch Top T-Post FC - French Door Cutout (Refer to manual for more details)	17. T-Post Location	NA - Natural HM - Honey Maple TK - Teak GO - Golden Oak PE - Pecan GB - Gray Birch RG - Rustic Gray BN - Brazil Nut NE - New Ebony WL - Walnut MH - Mahogany
4. Mount Type	IN - Inside Mount	French Door:	DB - Double Bypass for 2 1/2" and 3 1/2" louvers only	18. Window Side by Side	SS - Stainless Steel BL - Black
5. Shutter Type	SF - Standard Folding BF - Bi-Fold Slider BP - Bypass Slider TP - T-Post	Inside Mount: ST - Standard L Frame FLST - Flat Standard L Frame DF - Designer Frame EX - Extended Frame STX - Standard Extended Frame SL - Slimline Frame	19. Mount Magnets	20. Corner Group	AB - Antique Brass OB - Oil Rubbed Bronze
6. Frame Type	Outside Mount: ST - Standard L Frame FLST - Flat Standard L Frame DF - Designer Frame EX - Extended Frame STX - Standard Extended Frame SL - Slimline Frame	ZF - 2 Frame F12 - Flat Z Frame DZ - Deco Z Frame EL - Elegance Z Frame ST - Standard L Frame HS - Hanging Strip NF - No Frame (Net Panels)	21. Sliders: SL - Slimline Frame ST - Standard Frame FLST - Flat Standard Frame STX - Standard Extended	22. T-Post Location	Standard Magnets are pre-mounted onto shutters if marked (Y) Yes in this box. For Corner windows, a pair of shutters can be marked as Corner Group Left and Right. Order as window size and the factory will make all the deductions and frame configurations needed.
7. No. of Frame Sides	4W - 4-Sided Frame for Window (Outside or inside mounts) 3W - 3-Sided Frame for windows (Used for windows with crank on bottom or with Sill) 3D - 3-Sided Frame for doors 4A - 4-Sided Flat Top for arch 2W - 2-Sided Frame (For café style shutters)	23. Maximum Panel Widths: 4AS - 4-Sided Frame for Sill (Top & Bottom Sill Plate) NF-HG - No Frame with hinges. Panels Only with attached hinges (Use Frame Size Measurement Option) NF-NHG - No Frame, no hinges. Panels Only no hinges attached (Use Frame Size Measurement Option)	24. Provide width and height, and indicate whether they are Window opening size or Frame to Frame size. Wider Openings use T-Posts. Ensure mounting clearances around window or inside window (amb) for proper installation of frame.	25. Note # of panels folding Left (L) and Right (R) based on the opening width and folding direction desired.	26. Miramonte Premier Pricing (All pricing is based on outside of frame to outside of frame size)
10. Divider Rail or Split Tilt Rod	(1) Single Panel L or R 36" + Frame	(2) 2 Panels L/R 72" + Frame	(3) Bi-Fold L/L or R/R 52" + Frame	(4) 4 Panels L/L/R/R 104" + Frame	27. Miramonte Premier Pricing (All pricing is based on outside of frame to outside of frame size)
11. Divider Rail(s) or Split Tilt Rod Position(s)	Indicate if Panel number(s) in column 10 are for (D) Divider Rail or for (S) Split Tilt Rod.	28. Shutters over 84" tall must have 1 divider rail. Shutters over 108" must have 2. Rail(s) will be placed as close as possible to indicated height (from bottom of window to midpoint of rail), if no height is indicated, rail(s) will be located to evenly divide the panel. Split point will be placed as close as possible to indicated height (from bottom of shutter to mid-point of louver). C (Center) - if no height is indicated, split point will be located to evenly divide the panel.	29. Give outside of frame to outside of frame size	30. No Frame, Panels only	31. Designer Frame

10. Divider Rail or Split Tilt Rod	Indicate if Panel number(s) in column 10 are for (D) Divider Rail or for (S) Split Tilt Rod.	28. Shutters over 84" tall must have 1 divider rail. Shutters over 108" must have 2. Rail(s) will be placed as close as possible to indicated height (from bottom of window to midpoint of rail), if no height is indicated, rail(s) will be located to evenly divide the panel. Split point will be placed as close as possible to indicated height (from bottom of shutter to mid-point of louver). C (Center) - if no height is indicated, split point will be located to evenly divide the panel.
---------------------------------------	--	--

<b>I. Ordering By Shutter Frame to Shutter Frame Size:</b>	<b>Give outside of frame to outside of frame size</b>	<b>Width</b>	<b>x Height</b>	<b>/144</b>	<b>x \$/sqft x</b>
<b>No Frame, Panels only</b>		<b>Width</b>	<b>x Height</b>	<b>/144</b>	<b>\$/sqft</b>
<b>II. Ordering By Window Size:</b>	<b>Standard L Frame, Flat Standard Frame, Hang Strip (strip next to panel)</b>	<b>4 Sided</b>	<b>Width + 3"</b>	<b>x Height + 3"</b>	<b>/144</b>
<b>Outside Mount Frames -</b>		<b>3 Sided</b>	<b>Width + 3"</b>	<b>x Height + 1.5"</b>	<b>/144</b>
<b>Designer Frame</b>		<b>4 Sided</b>	<b>Width + 4.5"</b>	<b>x Height + 4.5"</b>	<b>/144</b>
<b>Extended Frame</b>		<b>3 Sided</b>	<b>Width + 4.5"</b>	<b>x Height + 2.5"</b>	<b>/144</b>
<b>Extended Frame</b>		<b>4 Sided</b>	<b>Width + 4"</b>	<b>x Height + 4"</b>	<b>/144</b>
<b>Extended Frame</b>		<b>3 Sided</b>	<b>Width + 4"</b>	<b>x Height + 2"</b>	<b>/144</b>
<b>Slimline Frame (French Door Only)</b>		<b>4 Sided</b>	<b>Width + 2.5"</b>	<b>x Height + 2.5"</b>	<b>/144</b>
<b>Z Frame</b>		<b>4 Sided</b>	<b>Width + 2"</b>	<b>x Height + 2"</b>	<b>/144</b>
<b>Inside Mount Frames -</b>		<b>3 Sided</b>	<b>Width + 2"</b>	<b>x Height + 1"</b>	<b>/144</b>
<b>Deco Z Frame and Flat Z Frame</b>		<b>4 Sided</b>	<b>Width + 3"</b>	<b>x Height + 3"</b>	<b>/144</b>
<b>Elegance Z Frame</b>		<b>3 Sided</b>	<b>Width + 4"</b>	<b>x Height + 2"</b>	<b>/144</b>
<b>Elegance Z Frame</b>		<b>4 Sided</b>	<b>Width + 4"</b>	<b>x Height + 2"</b>	<b>/144</b>
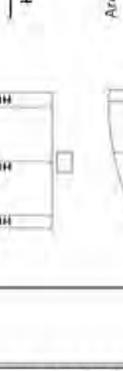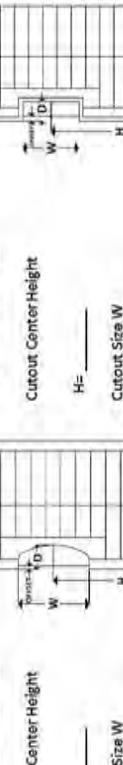
<p><b>T-Post - Draw Panels</b></p> <p><b>Line #</b> _____</p> 	<p><b>Custom Frames - Specify Frames</b></p> <p><b>Line #</b> _____</p> <table border="1" data-bbox="1209 283 1277 654"> <thead> <tr> <th>CV</th> <th>T</th> <th>L</th> <th>R</th> <th>B</th> </tr> </thead> <tbody> <tr> <td>_____</td> <td>_____</td> <td>_____</td> <td>_____</td> <td>_____</td> </tr> </tbody> </table>	CV	T	L	R	B	_____	_____	_____	_____	_____	<p><b>French Door Oval Cut Out</b> Slim line &amp; Standard L Frames</p> <p><b>Line #</b> _____</p> <p><b>Line #</b> _____</p> <p><b>Arch Top - Window Size Note:</b> HL - Left Height: HR - Right Height: HC - Center Height</p> 
CV	T	L	R	B								
_____	_____	_____	_____	_____								
<p><b>Special Instructions:</b></p>	<p><b>French Door Rectangle Cut Out</b> Standard L Frame Only</p> <p><b>Line #</b> _____</p> <p><b>Line #</b> _____</p> <p><b>Arch Line #</b> _____</p> 	<p><b>French Door Oval Cut Out</b> Slim line &amp; Standard L Frames</p> <p><b>Line #</b> _____</p> <p><b>Line #</b> _____</p> <p><b>Arch Line #</b> _____</p> 										
<p><b>Special Instructions:</b></p>	<p><b>French Door Oval Cut Out</b> Slim line &amp; Standard L Frames</p> <p><b>Line #</b> _____</p> <p><b>Line #</b> _____</p> <p><b>Arch Line #</b> _____</p> 	<p><b>French Door Rectangle Cut Out</b> Standard L Frame Only</p> <p><b>Line #</b> _____</p> <p><b>Line #</b> _____</p> <p><b>Arch Line #</b> _____</p> 										

1. Colors	Standard Colors: W - White S - Swiss coffee	Specialty Colors*: AG - "Acredible Gray" EW - "Eider White" PW - "Pearl" O - "Off White" *1 week longer lead time + surcharge
2. Louver Size	3" or 4"	ThermoCore Louver available colors: White, Swiss Coffee, Off White*, Pearl* *Specialty colors, same sample applies
3. Tilt Rod	F - Tilt Rod Front	B - Tilt in Back - (Off Set)      RFV - (Rear Full View) -Hidden Tilt
4. Mount Type	IN - Inside Mount SI - Standard Folding	OUT - Outside Mount TP - T-Post
5. Shutter Type	Outside Mount: SI - Standard L Frame FLSI - Flat Standard L Frame DS - Designer Frame STX - Standard Extended Frame (FD) SL - Slimline Frame (FD, FC)	Inside Mount: XF - "X" Frame FLZ - Flat Z Frame TR - "Tum" Frame EL - "Elegance" Frame FLST - Flat Standard L Frame
7. No of Frame Sides	4W - 4-Sided Frame for window (outside or inside mount) 4AS - 4-Sided Frame for Sill (Top & Bottom Sill/Frame on bottom) 4A - 4-Sided Flat Top for archi.	French Door: SL - "Slimline" Frame FLST - "Flat Standard" Frame STX - "Standard Extended" Frame
8. Size	Custom Frame configuration in any L & Z frames. Use with notes. Draw in <a href="#">Special Instructions section</a> .	Provide width and height and indicate whether they are Window opening size or Frame size. Width Openings use "T" - Posts. Ensure mounting clearances around window or inside window sash for proper installation of frame.
9. Panel Configuration	Notes on panels: Maximum Panel Widths: Single Panel L or R: 45" + Frame 2 Panels L/R: 72" + Frame	Notes on folding left (L) and right (R) based on the opening width and folding direction desired.
10. Divider Rail or Split Tilt Rod	Indicate if placement number(s) in column 10 are for (D) Divider Rail or for (S) Split Tilt Rod.	52" + Frame 4 Panels L/R 104" + Frame
11. Divider Rail(s) or Split Tilt Rod Position(s)	Shutters over 54" tall must have 1 divider rail. Shutters over 108" must have 2. Rail(s) will be placed as close as possible to indicated height (from bottom of window to midpoint of rail). If no height is indicated, rail(s) will be located to evenly divide the panel. Split point will be placed as close as possible to indicated height (from bottom of shutter to mid-point of louver). If no height is indicated, split point will be located to evenly divide the panel.	

12. Frame Spacers	Used to project shutters 1" toward window's head clearance to operate. i.e. - mounting beyond molding, to clear door handles or mounting a standard shutter on sliding door.
13. Astragal	Special Stiles with Astragal white panels meet.
14. Hinge Color	Shutter Color (1)      Default Hinge Color (1A)      Custom Hinge Color (1A)
W - White	W - White
S - Swiss Coffee	S - Off White
O - Off White	O - Off White
PW - Pearl	PW - Pearl
EW - Eider White	EW - Eider White
AS - Agreable Gray	AS - Nicel Satin
UB - Recessed Magnets	UB - Recessed Magnets are pre-mounted onto shutters if marked (Y) yes in this box.
15. Mount Magnets	For corner windows, a pair of shutters can be mounted as corner group left and right. Order as window size and the factory will make all the deductions and frame configurations needed.
16. Corner Group	Distance from left point of even size to center of T Post 1 & T Post 2.
17. T-POST Location	Draw folding direction of T-Post panels below.
18. Window Side by Side	Window Size - From left of window to center of T-Post. Frame Size - From Left Frame to center of T-Post. To ensure rails are the same size, make sure heights are the same for all next to each other shutters.

I. Ordering By Shutter Frame to Frame Size:	Give outside of frame to outside of frame size.
II. Ordering By Window Size:	Outside Mount Frames -
	Standard L Frame, Extended Frame, Flat Standard Frame Designer Frame
	Hanging Strip (strip behind panel on wrap around hinge)
	Slimline Frame (French Door Only) Z Frame
	Inside Mount Frames -
	Trim Z Frame & Flat Z Frame
	Standard L Frame, Flat Standard Frame Hanging Strip (strip behind panel on wrap around hinge)


Width	x Height x Height	/144	x \$/sqft
Width	x Height	/144	x \$/sqft
Width	x Height + 4"	/144	x \$/sqft
Width	x Height + 4"	/144	x \$/sqft
Width	x Height + 5"	/144	x \$/sqft
Width	x Height + 2.5"	/144	x \$/sqft
Width	x Height + 3"	/144	x \$/sqft
Width	x Height + 3"	/144	x \$/sqft
Width	x Height + 2.5"	/144	x \$/sqft
Width	x Height + 1.5"	/144	x \$/sqft
Width	x Height + .75"	/144	x \$/sqft
Width	x Height	/144	x \$/sqft
Width	x Height + 3"	/144	x \$/sqft
Width	x Height + 3"	/144	x \$/sqft
Width	x Height + 3"	/144	x \$/sqft
Width	x Height + 4"	/144	x \$/sqft
Width	x Height + 2"	/144	x \$/sqft
Width	x Height	/144	x \$/sqft

**BILL TO:**Ph:  
Email:


**NOTICE**  
French Door are designed to complement wood and  
polyciad shutters with coordinated frames. They will  
match closely in look and color but, due to differences in  
material, a "perfect" match is unlikely. French Door are  
custom made and not subject to cancellation.

**FRENCH DOOR  
CUTOUT WORKSHEET**
Tel: 800.737.4569 Fax: 323.727.6891 Email: [orders@uspolymerinc.com](mailto:orders@uspolymerinc.com)CUSTOMER  
SIGNATURE**SHIP TO:**

Ph:

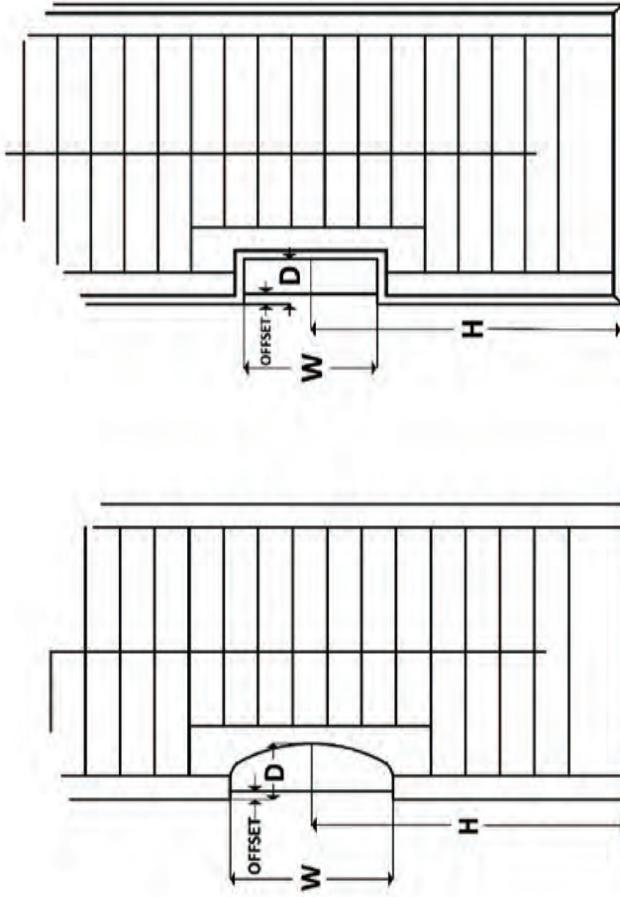Date:  
P.O.# /  
SIDEMARK:**FRENCH DOOR****CUTOUT WORKSHEET**Tel: 800.737.4569 Fax: 323.727.6891 Email: [orders@uspolymerinc.com](mailto:orders@uspolymerinc.com)

In the case of a French door, measure the frame size. This must include a  $1\frac{1}{2}''$  or  $1\frac{3}{4}''$  flat area around window to mount the Slimline Frame or Standard Frame, respectively. Make sure there is room between the door handle and glass to mount the frame. French Door Cut Outs are available in ShutterSMART, Miramonte and Miramonte Premier. For French doors with a molding around the glass, you can either measure to mount on the molding or to do a build out around the molding using a Frame spacer. **NOTE:** Order all French doors within view of each other the same height.

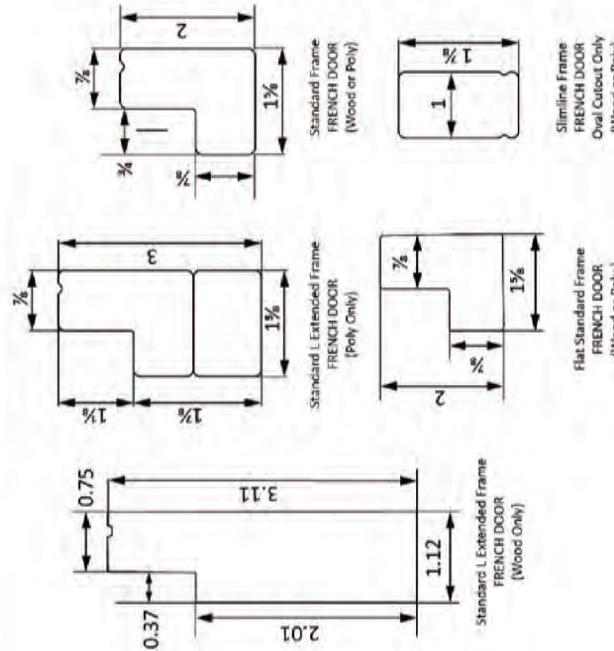**Frame Options****Rectangle Cutout**

Standard L Frames Only

Cutout Depth **D** =  $4\frac{7}{8}''$ Cutout Size **W** 10"  12"  14" Cutout Center Height **H** = \_\_\_\_\_ $\frac{3}{4}''$  Optional Offset **Oval Cutout**

Slimline &amp; Standard L Frames

Cutout Depth **D** =  $4\frac{7}{8}''$ Cutout Size **W** 10"  12"  14" Cutout Center Height **H** = \_\_\_\_\_ $\frac{3}{4}''$  Optional Offset

**BILL TO:**  
Ph:  
Email:



		<b>ShutterSmart</b>		SHIP TO:	
				Ph:	
<b>NOTICE</b>		<b>CUSTOMER SIGNATURE</b>			
Arches are designed to complement wood and polycaid shutters with coordinated frames. They will match closely in look and color but, due to differences in material, a "perfect" match is unlikely. Arches are custom made and not subject to cancellation.					
		<b>SUNBURST ARCH &amp; OTHER SHAPE ORDER FORM</b>		SIDEMARK _____	
		Do Not Use for Arch Top Shutters		Date: _____	
		Tel: 800.737.4569 Fax 323.727.8891 Email: <a href="mailto:orders@uspolymersinc.com">orders@uspolymersinc.com</a>		Send This Order Together with Regular Shutters Under the Same Sidemark <input type="checkbox"/> YES	

Ref Qty	Room	Shutter Type	Colors	Mount Type	Arch Type	For AO only Louver Size	For AO Only Tilt Position	Frame Type	Frame Sides	Size			With Separate Frame	Price	
										1	2	3			4
1		SS MM	White Off white Ivory Swiss Coffee Pearl	In Out	AH AL AE AO Other	3" 4" 2½" 3½" 4½"	F B RFV in MM	SS-ST MM-ZF SS-TR MM-DZ SS-DS MM-DF SS-FST MM-FST SS-FLZ MM-FLZ SS-EL	AW AS	W FT S	Width	Height	Leg L	Leg R	Yes No
2															
3															
Instructions and Code Key															
1	Shutter Type	SS - ShutterSmart	MM - Miramonte Painted				7			Frame Type	SS-ST (Z Frame) SS-TR (Z Frame) SS-EL (Elegance Z) MM-FST (Flat Standard)	SS-TR (Trim Z) SS-EL (Elegance Z) MM-FLZ (Flat Z Frame)	SS-DS (Designer) MM-ST (Standard)		
2	Colors	All ShutterSmart (SS) and Miramonte Painted Available (MM)						8			Frame Sides	MM-ZF (2½") MM-DF (Deco Z Frame)	MM-FLZ (Flat Z Frame)	MM-EL (Elegance Frame)	
3	Mount Type	IN - Inside Mount	OUT - Outside Mount				9			Size	AW - Arch Window with same frame design on all sides including arch bottom				
4	Arch Type	AH - Half Circle	AL - Elongated	AE - Eyebrow	AO - Arch with Horizontal Louvers							AS - Sill frame on the bottom of the arch (required when placing an arch on top of shutter frame)			
	<input type="checkbox"/> Other	Provide width and height and indicate whether they are Window Opening Size, Frame Face Tip to Tip Size or Shutter Size.													
5	Louver Size	W - Window opening Size: Factory makes the additions below to the opening size to get the arch tip to tip size that face mounts around the window:													
6	Tilt Position	Inside Mounts: Factory deducts $\frac{1}{8}$ " to opening then adds frame overlap size SS-ZF (1½") SS-FLZ (2½") SS-TR (2½") SS-EL (4½") MM-ZF (1½") MM-FLZ (2½") MM-TR (2½") MM-EL (4½")													
		Outside Mounts: Factory adds the following to opening size for the frame overlap SS-ST (4") SS-FST (4") SS-DS (5") MM-ST (2½") MM-FST (2½") MM-DF (4½")													
		FT - Frame Face Tip to Tip Size: Factory makes no additions to this size. Typically used when matching an existing shutter or when factory standards should not be used.													
		S - Shutter Size: To be used only by shutter size customers that make inside mount deductions or outside mount additions. Factory will add the frame face overlaps for inside mounts.													
		Sunburst Arches: Max FT Width = 96", Max FT Height = 48" and Min FT Height = 16".													
		A Separate Frame is made in addition to Arch													
		AO only: Thermacore 3" 4"   Wood 2½" 3½" 4½"						10			With Separate Frame				
		<input type="checkbox"/> AO only: F - Tilt Rod in Front B - Tilt in Back - Off Set RFV - Rear Full View - Hidden Tilt						11			Price				

**BILL TO:** Anyone in USA  
Acct. Ph:  
Email:

**Shutter Smart**

Thermacore

Ph:

Shutters are custom made.  
This order is not subject to cancellation or change

Customer Signature

Window Size Order Form  
Tel: 800.737.4569 Fax: 323.727.6891 Email: orders@uspolymersinc.com

**SAMPLE ONLY**

Date: 1/23/2014

P.O.# / SIDEMARK

1 Room Color 1 2 Louver Size 3 Tilt-Rod 4 Mount Type 5 Shutter Type 6 Frame Type 7 No. of Sides 8 SIZE W - Window Size F - Frame to Frame

9 No. of PANELS Folding Direction

10 Dividing Rail or Split Rail Position(s)

11 Frame Spacing 1"

12 Frame Tilt

13 Astragal

14 Hinge Color

15 Mount Magnets

16 Corner Group

17 T-Post from Left to center of T-Post

18 Window Side by Side

TP1 TP2

Y or N

Left Right

D S

1st (Y)

2nd (Y)

W O

AL NS

AB BP

OB SS

BL

1	Bedroom	W	3"	F	In	SF	TR	4S	W	48"	52"	1	1	Y
2	Office	P	3"	F	Out	TP	ST	4W	W	120"	72"			N 60"
3	Dining	S	3"	RFV	In	AR	TR	4S	W	70"	88"	1	1	D Y
4	Living	W	3"	B	In	FC	SL	4W	W	27 1/2"	67 1/2"	1		Y
5	Formal	0	3"	RFV	In	AR	TR	4S	W	70"	88"	1	1	D N
6														
7														
8														
9														
10														

**SPECIAL INSTRUCTIONS**

T-Post - Draw Panels

Line # 4

Custom Frames - Specify Frames

Line # 4

French Door Oval Cut Out

Slim line & Standard L Frames

Line # 4

French Door Rectangle Cut Out

Standard L Frame Only

Line # 5

Arch Top - Window Size Note:

HL - Left Height: HR - Right Height : HC - Center Height

Arch Line # 5

54" 88" 54"

HL HC HR

(Opens Height)

Arch Line # 5

HL HC HR

(Opens Height)

Line # 4

CW T L R B

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

10" 12" 14"

# PRICING

## Base Pricing

Shutters are priced by the Square foot. Shutters can be ordered by Frame size or Window size. All pricing is based on shutter frame edge to frame edge size. The tables show how to get the pricing frame sizes.

### ShutterSMART / AllView

#### I. Ordering By Shutter Frame to Shutter Frame Size:

Outside Mount Frames only (give outside of frame to outside of frame size) or Panels only		Width	x Height	/144	x \$/sqft
<b>II. Ordering By Window Size:</b>					
Outside Mount Frames -	Standard L Frame, Flat St Frame, Extended Frame	4-Sided <u>3-Sided</u>	Width + 4" Width + 4"	x Height + 4" x Height + 2"	/144 /144
	Designer Frame	4-Sided <u>3-Sided</u>	Width + 5" Width + 5"	x Height + 5" x Height + 2.5"	/144 /144
	Hanging Strip ( <i>Strip behind panel on wrap hinge</i> )	4-Sided <u>3-Sided</u>	Width + 3" Width + 3"	x Height + 3" x Height + 1.5"	/144 /144
	Slimline Frame ( <i>French Door Only</i> )	4-Sided	Width + 2.5"	x Height + 2.5"	/144
Inside Mount Frames -	Z Frame	4-Sided <u>3-Sided</u> <u>2-Sided</u>	Width + 1.5" Width + 1.5" Width + 1.5"	x Height + 1.5" x Height + .75" x Height	/144 /144 /144
	Trim Z / Flat Z	4-Sided <u>3-Sided</u> <u>2-Sided</u>	Width + 3" Width + 3" Width + 3"	x Height + 3" x Height + 1.5" x Height	/144 /144 /144
	Elegance Frame	4-Sided <u>3-Sided</u> <u>2-Sided</u>	Width + 4" Width + 4" Width + 4"	x Height + 4" x Height + 2" x Height	/144 /144 /144
	Standard Frame	<u>4,3,2-Sided</u>	Width	x Height	/144
	Hanging Strip ( <i>Strip behind panel on wraparound hinge</i> )	4,3,2 Sided	Width	x Height	/144

### MiraMonte/ MiraMonte Premier

#### I. Ordering By Shutter Frame to Shutter Frame Size:

Outside Mount Frames Only (give outside of frame to outside of frame size) or Panels only		Width	x Height	/144	x \$/sqft
<b>II. Ordering By Window Size:</b>					
Outside Mount Frames -	Standard L Frame, Flat St Frame	4-Sided <u>3-Sided</u>	Width + 3" Width + 3"	x Height + 3" x Height + 1.5"	/144 /144
	Designer Frame	4-Sided <u>3-Sided</u>	Width + 4.5" Width + 4.5"	x Height + 4.5" x Height + 2.5"	/144 /144
	Hanging Strip ( <i>strip next to panel</i> )	4-Sided <u>3-Sided</u>	Width + 3.5" Width + 3.5"	x Height + 3.5" x Height + 1.5"	/144 /144
	Extended Frame	4 Sided <u>3-Sided</u>	Width + 4" Width + 4"	x Height + 4" x Height + 2"	/144 /144
	Slimline Frame ( <i>French Door Only</i> )	4 Sided	Width + 2.5"	x Height + 2.5"	/144
Inside Mount Frames -	Z Frame - Miramonte only	4 Sided <u>3 Sided</u> <u>2-Sided</u>	Width + 2" Width + 2" Width + 2"	x Height + 2" x Height + 1" x Height	/144 /144 /144
	Deco Z/ Trim Z/ Flat Z Frame	4 Sided <u>3 Sided</u> <u>2-Sided</u>	Width + 3" Width + 3" Width + 3"	x Height + 3" x Height + 1.5" x Height	/144 /144 /144
	Elegance Frame -Miramonte only	4 Sided <u>3 Sided</u> <u>2-Sided</u>	Width + 4" Width + 4" Width + 4"	x Height + 4" x Height + 2" x Height	/144 /144 /144
	Standard L Frame	<u>4,3,2-Sided</u>	Width	x Height	/144
	Hanging Strip ( <i>Strip behind panel on wrap around hinge</i> )	4,3,2-Sided	Width	x Height	/144



## Surcharges - charges per shutter unless noted otherwise.

CATEGORY	ALLVIEW	SHUTTERSMART		MIRAMONTE	
PRODUCT	POLY	THERMACORE	SOLIDCORE	PAINTED	STAINED
LEAD TIME	1 WEEK	1 WEEK	2 WEEKS	2 WEEKS	3 WEEKS
<b>SURCHARGES (per opening)</b>					
Rear Full View (hidden tilt)	N/C	\$20	\$20	\$20	\$20
AllView Front tilt add on	\$5	N/A	N/A	N/A	N/A
Back Tilt Rod (off set)	N/A	\$15	\$15	\$15	\$15
Astragal	N/C	N/C	N/C	N/C	N/C
Split Tilt Rod	N/C	N/C	N/C	N/C	N/C
T-Post (per T-Post)	N/C	N/C	N/C	N/C	N/C
Horizontal T-Post	\$50	\$50	\$50	\$50	\$50
Double Hung	\$75	\$75	\$75	\$75	\$75
Energy Guard	N/A	\$20	N/A	N/A	N/A
AllView Track System	\$75	N/A	N/A	N/A	N/A
Bifold Slider (Top track only)	N/A	\$225	\$225	\$225	\$225
Bypass Slider (Top track only)	\$225	\$225	\$225	\$225	\$225
Bifold/Bypass Slider w/Bottom Track	\$250	\$250	\$250	\$250	\$250
Double Bypass Slider	\$250	\$250	\$250	\$250	\$250
French Door Cut Out	N/A	\$150	\$150	\$150	\$150
Pre-mounted Magnets	\$5	\$5	\$5	\$5	\$5
Frames Spacers	\$25	\$25	\$25	\$25	\$25
Sunburst Arch	N/A	\$300	\$300	\$300	N/A
Sunburst Arch w/bottom frame	N/A	\$450	\$450	\$450	N/A
Arch Top Shutters	N/A	\$250	\$250	\$325	\$325
Arch Custom Shapes	N/A	\$350	\$350	\$395	\$395
Stainless Steel Hinges	\$15	\$15	\$15	\$15	\$15
Black Hinges	N/A	\$15	\$15	\$15	\$15
Custom Frame Configuration	\$25	\$25	\$25	\$25	\$25
Non-Standard Shutter	\$50	\$50	\$50	\$50	\$50
Ext Frame w/Deco Valance	\$60	\$60	\$60	\$60	\$60
SS Specialty Color	N/A	\$25	\$25	N/A	N/A
Custom Color/Stain Match	N/A	N/A	N/A	\$150	\$150

**Lead Times** - All orders are confirmed in 24-48 hours. If you do not receive an order confirmation in 48 hours that means your order is not being processed. There could be a variety of reasons for this including, not receiving the order, incomplete information, out of spec design, or questions that need to be answered, to name a few. If you do not receive your confirmation, please contact customer service. Orders are typically produced in the quoted lead times below and shipped on the next available truck according to our truck schedules. For Faster Order Processing, Order Online!

**Note:** Add 1 week to lead times for Specialty Colors, French door cut outs.

Sunburst Arches, Archtop shutters and Specialty Shapes takes 6 weeks.

Lead times are estimates and may change from time to time. Actual completion dates are shown on order confirmations.

All orders are shipped on the next available truck in your area. Check truck route schedules for delivery dates.

## Price Examples

### Window Size

1. Measure a standard window by taking the inside measurements of the width and height. Convert shutter width and height to decimals using conversion table below.

Fraction	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"
Decimal	.125"	0.250"	0.375"	0.500"	0.625"	0.750"	0.875"

2. Make the appropriate frame addition from the price charts on previous page to get Frame Width and Height.
3. Multiply **Framed Width** (inches) x **Height** (inches) & **divide by 144** to get Pricing Sqft. (*round up to closest 1/2 sqft*).
4. Multiply the Pricing Sqft by your price \$ /sqft to get the shutter price.
5. Add applicable surcharges and freight.

### Frame Size

1. Multiply **Framed Width** (inches) x **Height** (inches) & **divide by 144** to get Pricing sqft. (*round up to closest 1/2 sqft*)
2. Multiply the Price Sqft by your price \$ /sqft to get the shutter price. (call for your sqft price)
3. Add applicable surcharges and freight.

Examples:

1. Outside Mount MiraMonte shutter with 3-sided Standard L frame. The opening measures 48.5" x 52"

	Window Size	Frame Size
1. Measure opening size	48.5" width x 52" height	-
2. Make frame additions	48.5" W + 3" x 52"H + 1.5"	-
3. Pricing Sqft	51.5"x53.5"/144 = 19.14 sqft (round up to 19.5)	51.5"x53.5" /144 =19.14 sqft (round up to 19.5)
4. Unit Price	19.5 sqft x \$20/sqft = \$390.00	19.5 sqft x\$20/sqft = \$312
5. Surcharge	- N/A	- N/A
Total Price	\$390	\$390

2. Inside Mount ShutterSMART shutter with 4-sided Z frame. The opening measures 48.5" x52"

	Window Size	Frame Size
1. Measure opening size	48.5" width x 52" height	N/A
2. Make frame additions	48.5" W + 1.5" x 52"H + 1.5"	N/A
3. Pricing Sqft	50"x53.5"/144 = 18.6 sqft (round up to 19)	N/A
4. Unit Price	19 sqft x \$20sqft = \$266	N/A
5. Surcharge	- N/A	N/A
Total Price	\$380	N/A

# MEASURING

## Important Guidelines

1. Use a steel measuring tape and measure to the closest 1/8"
2. Measure every opening separately even if they appear to be the same.
3. Windows next to each other should be ordered the same height to have the same louver/rail count. For windows next to each other pick largest height for outside mount and smallest height for inside mount. Note: Side by side on the order for those lines.

**Note:** for training videos on measuring and design, go to [www.shuttersmart.com](http://www.shuttersmart.com) dealer login section.

## Two Measuring Methods


There are 2 methods for measuring windows:

1. **Window Size Measuring** for inside and outside mounts
2. **Frame Size Measuring** for outside mounts or to match/cover molding with Z frames

### I. Window Size Measuring

The factory makes all the frame additions & deductions.  
Ensure proper mounting clearances.

Used for both inside and outside mount, the window size measures both the width and height of the window from the inside of the opening as shown below. The factory will make all the deductions or additions for any frame you select.

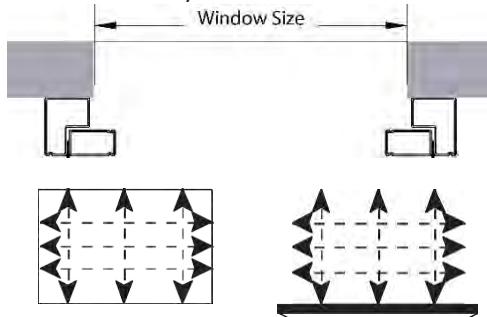

### Outside Mount

Measure width & height in 3 places and record the largest measurement. The table below shows the frame additions the factory will make to the window size.


Clearance - Ensure that there is proper clearance on all 4 sides of opening to accommodate the frame.

Factory Frame Additions for Outside Mounts			
ShutterSMART & AllView		MiraMonte, Miramonte Premier	
Standard L Frame	+4"	Standard L Frame	+2.5"
Designer Frame	+5"	Designer Frame	+4.5"
Hanging Strip	+3"	Hanging Strip	+3.5"
Extended Frm, Track	+4"	Extended Frame	+4"

**Note:** Height additions on all Sill, Door or 3 sided situations will be 1/2 of the above addition.

**Inside Mount** Measure width & height in 3 places and record the smallest measurement. The table below shows the deductions the factory will make to the window size.

Clearance - Ensure that there is proper clearance inside of window jamb to accommodate the frame.



For Inside Mounts:  
Check window for squareness by measuring diagonally.  
If diagonals differ by up to:  
1/2", use Z frame  
1/2" to 1", use Trim or Deco Z Frame  
Over 1", use Outside mount


Factory Frame Deductions for Inside Mounts	
ShutterSMART AllView, MiraMonte & Miramonte Premier	
Z, Trim, Flat Z, & Elegance Frames	-1/4" total
Standard L Frame	-3/16" total
Hanging Strip	-3/16" total

## II. Frame Size Measuring

**The factory makes no additions or deductions to this size.**


**Ensure proper mounting clearances.**

Frame size measures both the width and height of the shutter including the frames. This can be used for outside or inside mounts where the frame tip to tip measurements are known. These are typical for special situations like lack of proper clearances or windows with molding.

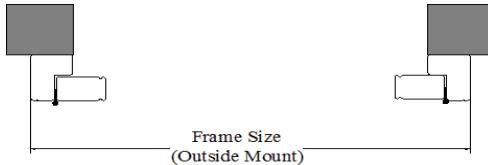

### Outside Mount

Measure width & height in 3 places and record the largest size. Make sure to include the Frame Additions from the table above.

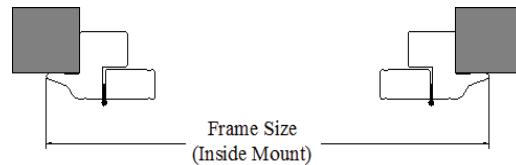

### Inside Mount

Measure width & height in 3 places and record the smallest size. Make sure to consider the proper Z Frame overlap dimensions.



## 3 Outside Mount Situations That Require Frame Size Ordering

**1. Windows With Lack of Proper Clearance:** Order by frame size whenever there is lack of proper clearances around window. Our standard factory additions will not work in these situations.






**2. Mounting on Molding:** Make sure there is a wide and flat area on molding for shutter frame to sit on.

The clearance area required on molding is shown in the table below:

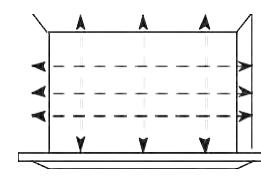



Minimum Molding Size for Mounting On Molding	
ShutterSMART & AllView	MiraMonte & MM Premier
Standard L Frame	1 3/4"
Designer Frame	2 1/2"
Hanging Strip	1 1/4"
Standard L Frame	1 1/4"
Designer Frame	2"
Hanging Strip	1 1/2"

**3. Mounting Beyond Molding:** Make sure your size includes a frame overlap beyond molding as indicated in Frame Additions chart above.

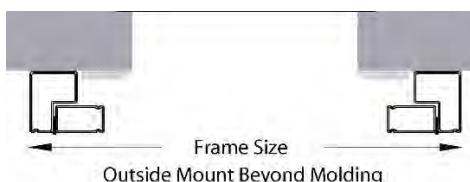

## Specialty Situations


**French Doors:** In the case of a French door, measure the frame size. This must include a 1 1/8" or 1 3/4" flat area around window to mount the Slimline Frame or Standard Frame, respectively. Make sure there is room between the door handle and glass to mount the frame. French Door Cut Outs are available in ShutterSmart, MiraMonte and MiraMonte Premier. For French Door Cut Outs specify the shape, the height to the center of the cut out and the size of the cut out. For French doors with a molding around the glass, you can either measure to mount on the molding or to do a build out around the molding use a French door standard frame. **NOTE:** Order all French doors within view of each other the same height.

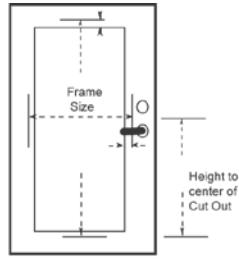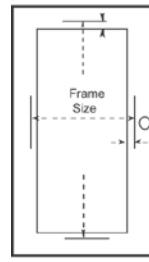


- Special Shape Available: Oval, Rectangle.

**Bay Windows:** In the case of bay windows, follow the guidelines below to measure.

Mount Type	Measurement Method	Note
Outside Mount	Frame Size (tip to tip)	Record frame size of each shutter. Use 3 pieces of frame to create an imaginary line in front of opening where the frames will be mounted.
Inside Mount	Window Size	Record window sizes BUT make sure Z overlap lips will not hit each other.
	Frame Size (tip to tip)	Record frame tip to tip sizes from outer edge of Z frames.

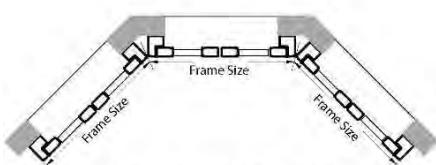


Outside Mount Bay Window

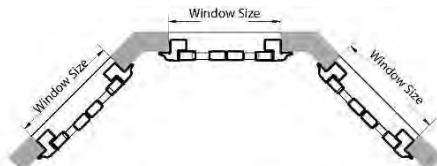


Inside Mount Bay Window

**Corner Windows:** When 2 windows meet in a corner, the shutter pair is considered to be a corner group.

Mount Type	Measurement Method	Note
Outside Mount	Window Size	Specify Corner Group Left or Right shutter on the order form. When installing an outside mount corner unit, the corner frames are attached to the top and bottom of window opening only. Alternatively, you can also order extra frames to mount behind corner frames for ease of installation.
Inside Mount	Window Size	Specify Corner Group Left or Right shutter on the order form. Factory will make Deductions.




Outside Mount Corner Windows

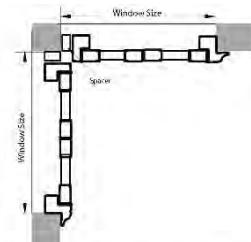


Inside Mount Corner Windows

**T-Post:** Typically used with wide windows or windows with breaks or mullions in the glass.

Mount Type	Measurement Method	Note
Inside Mount Or Outside Mount	Frame Size	Measure the frame size and identify the T-post locations from the outer edge of the left frame to the center of each T-Post (TP1 & TP2).
Inside Mount Or Outside Mount	Window Size	Measure the window size and identify the T-post locations from the inside edge of the window opening to the center of each T-Post (TP1 & TP2).

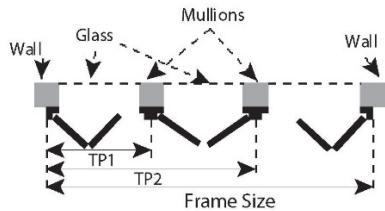

Outside Mount T-Post Shutters

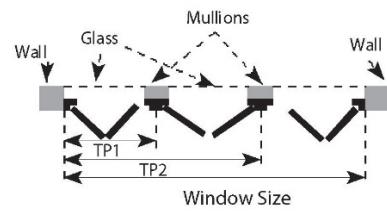

Inside Mount T-Post Shutters

## DESIGNING SHUTTERS

Designing the perfect shutter is easy. Just follow the 6 steps below.


1. Choose Shutter Type
2. Select Mounting Option
3. Choose Frame Type
4. Check Louver Clearance
5. Choose Number of Frame Sides
6. Panel Configuration

## I. Shutter Types


### 1. Standard Folding Shutters

Standard Folding Shutters are used in 90% of all applications and are available in ShutterSMART Thermacore, ShutterSMART SolidCore, AllView, MiraMonte and MiraMonte Premier.


- **Single Panel** - 1 panel can be attached to each or any frame leg.

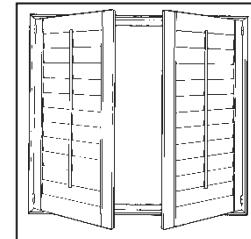


- **Bi Fold Panels** – Up to 4 panels can be mounted on each or any frame leg.

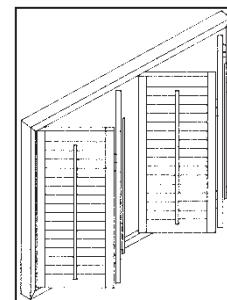

- **Corner Groups** - In the case of two windows meeting in a corner the standard folding shutters should open away from the corner.



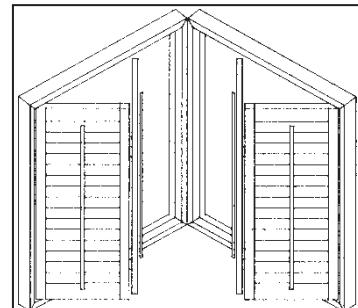


- **Bay Windows** - In the case of a Bay window where the shutters can be mounted outside the opening. Following is a diagram of how standard folding shutters are mounted. Use a single or bi fold panel design.

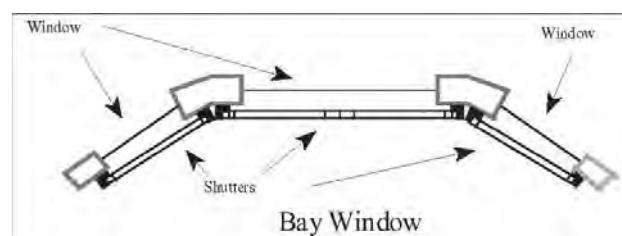



## 2. Bypass Sliding Shutters

Bypass sliding shutters are the perfect shutter for sliding glass doors. The Panels require no space in front to swing outward. The **Bypass w/ Bottom Track** slider adds a bottom track to the Bypass Slider to guide panels. Bypass shutters are available in ShutterSmart, ShutterSmart SolidCore, AllView, MiraMonte and MiraMonte Premier. ShutterSMART also offers a **Double Bypass** open louver shutter that allows a full view when the panels and louvers are in the open position. The Double Bypass is only available with 3", 2 ½" and 3 ½" louvers.

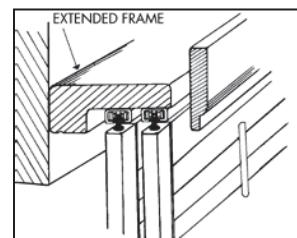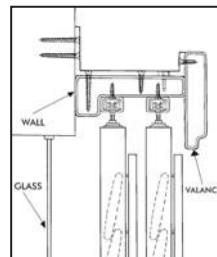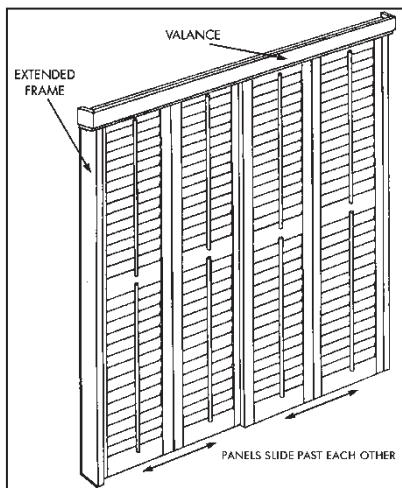




## 3. Bi Fold Sliding Shutters

Most commonly used for sliding glass doors, the panels on the Bi fold track system are guided by pivots in an overhead track. The outer panels are attached on pivots. The track gives additional support for large panels and offers a smooth operation. The Bi Fold Sliding shutter is available in ShutterSmart, MiraMonte and MiraMonte Premier.

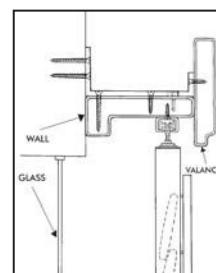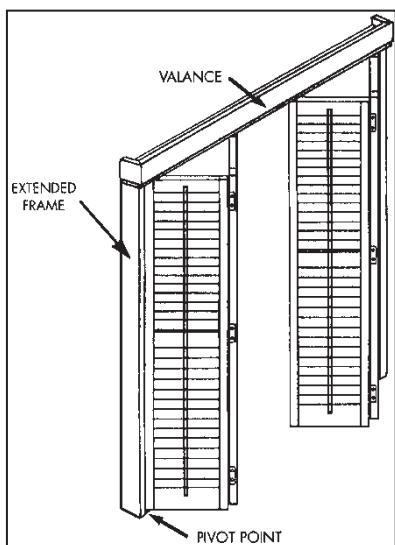

#### 4. Track Shutters

Track shutters are used for sliding glass doors, normal windows or windows where space in front of the shutter is not enough for the panels to swing open. Our patent pending slim track design allows for inside mounting in most windows a wood blind would fit in. When covering sliding glass doors, the Track shutter eliminates the slider surcharge saving consumers hundreds of dollars on each slider. The Track system is easy to install, snapping into conventional blind L brackets with clips and is covered with a valance. **There are no side frames.** The Track Shutter is available only in AllView Shutter as all other shutters are too heavy for this design.

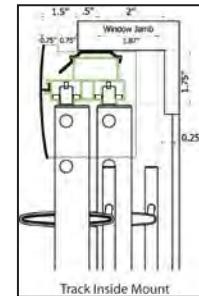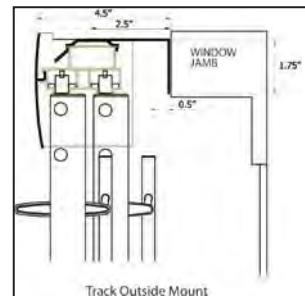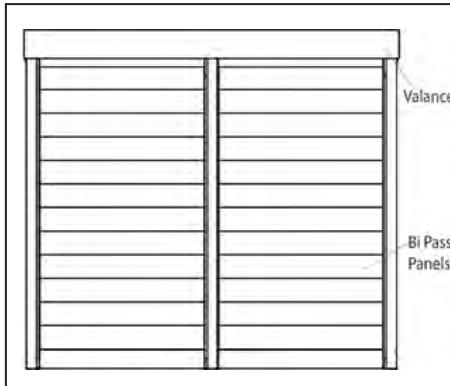


#### 5. French Doors

The French Door Shutter is a panel mounted in front of a Slimline frame or mounted in a Standard frame.

A minimum of 1 1/8" or 1 3/4" of flat space is required between the edge of the glass and the knob/lever hardware to accommodate the Slimline frame or the Standard frame, respectively. Otherwise, the frame will protrude slightly into the window opening when mounted. For doors with projecting handles, we offer the French Door Cut Out in ShutterSMART, MiraMonte and MiraMonte Premier. Cut outs come in Oval or Rectangular shapes in 10", 12" or 14" heights. Standard French Door Cut Outs are designed for a 3.5" handle.

Larger handles require a custom cutout. Additional charges will apply.

**Note:** French door panels are limited to a maximum width of 30". French Door cutout has a 6" gap between the cutout and the adjacent louvers on the top/bottom.

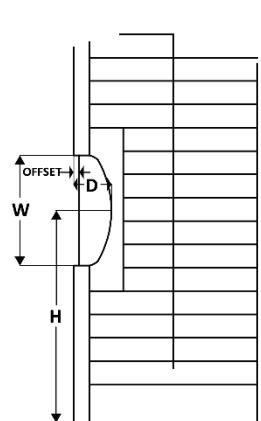

Oval Cutout


Slimline & Standard L Frames

Cutout Depth **D** = 4  $\frac{7}{8}$ "

Cutout Size **W** 10"  12"  14"

Cutout Center Height **H** = \_\_\_\_\_

$\frac{3}{4}$ " Optional Offset

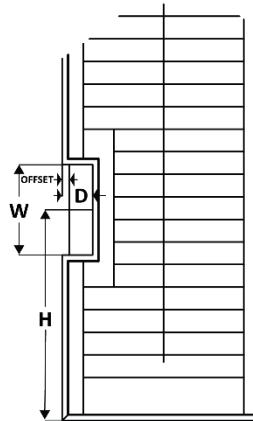

Rectangle Cutout

Standard L Frames Only

Cutout Depth **D** = 4  $\frac{7}{8}$ "

Cutout Size **W** 10"  14"

Cutout Center Height **H** = \_\_\_\_\_


$\frac{3}{4}$ " Optional Offset

## 6. T-Post

A T-Post is used in two cases:


- 1) Wide Openings where a shutter must be wider than the maximum allowable shutter width.  
(refer to panel design section for maximum shutter widths)
- 2) A window with breaks where panels need to be hinged and opened in front of the breaks.

**Always measure from the far left of the Window to the middle of each t-post and provide that number on the order form**

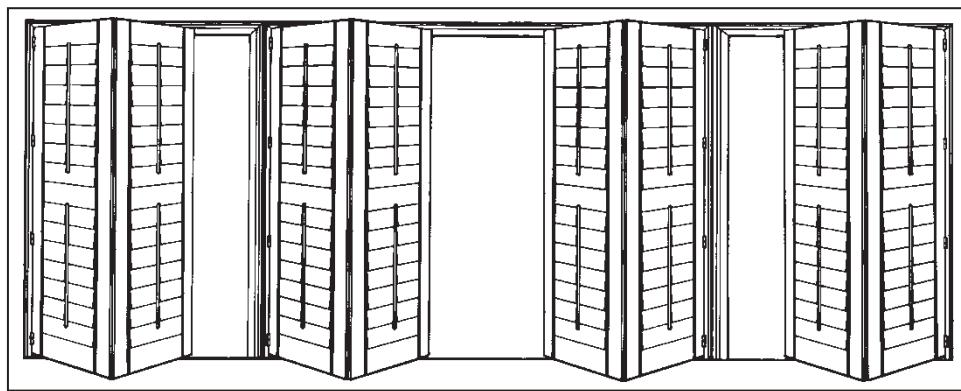

## 7. Double Hung

A double hung shutter has two sets of panels hinged on top of each other that open independently. Double hungs can also be made with a Horizontal T-Post, a surcharge applies.

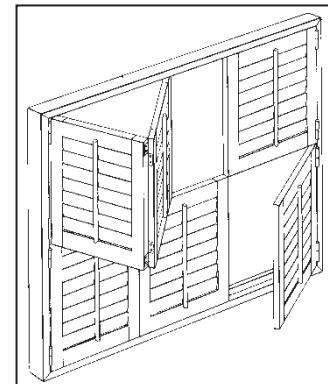



## II. Mounting Option

### 1. Outside Mount

Outside mounts are very popular and highly recommended as they do not close up the window, increase the light coming in and increase the view.

There are 3 mounting options:

- **Mounting on Drywall**- The Shutter frame is mounted on the wall area surrounding the opening. There must be a flat wall area wide enough to accommodate the frame.
- **Mounting on Molding/Trim**- The shutter frame can be mounted on the trim if the trim is flat enough so that the frame can sit on it.
- **Mounting Beyond Molding**- The shutter frame can also be mounted on the outside of the trim with a frame spacer or an extended Frame. Alternatively, the trim can be removed, and the shutter mounted in its place.

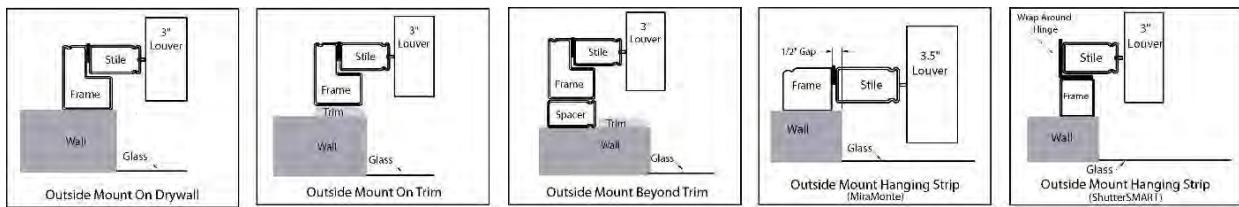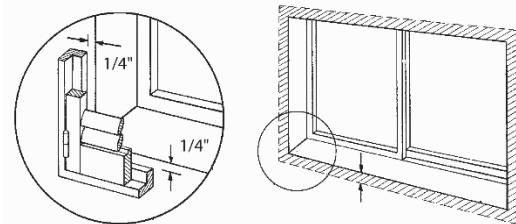



When mounting outside, make sure there is enough clearance around the opening for your choice of frame.

Required Clearances around opening for mounting of frame			
ShutterSMART & AllView Frames	Standard L Frame 2"	Designer Frame 2 1/2"	Hang Strip 1 1/2"
MiraMonte & MiraMonte Premier Frames	Standard L Frame 1 1/2"	Designer Frame 2 1/4"	Hang Strip 1 1/2"

### 2. Inside Mount

For Inside mounts there must be enough depth for the frame to sit inside of the window jambs.

Z frames are highly recommended for all inside mounts. They eliminate problems associated with out of square windows and the need for caulking. Standard Frames and hanging strips should only be used in the case of a window with a molding/trim border around it.

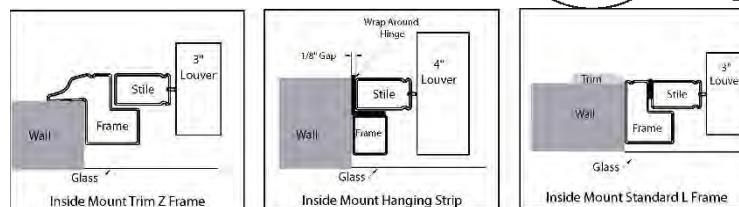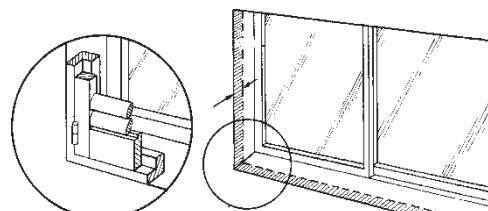

Required Depth for frames – ADD louver clearances indicated on next page			
ShutterSMART & AllView Frames	Z Frame 1 1/2"	Trim Z / Elegance Frame 1 3/8"	Std L Frm/ Hang Strip 2 1/4"
MiraMonte & MiraMonte Premier Frames	Z Frame 1 1/4"	Deco Z / Elegance Frame 1 3/8"	Std L Frm/ Hang Strip 2 1/4"


### III. Frame Choices

The product summary section of this manual covers the choices of frames available for inside and outside mount. Following is a list of all the frames available with each mounting option:


Situation	ShutterSMART & AllView Frame	MiraMonte & MiraMonte Premier Frames
Outside Mount	Standard L Frm, Designer Frm, Hang Strip, Extended Frm, Flat St	Standard L Frm, Designer Frm, Hang Strip, Extended Frm / Flat St
Inside Mount	Z, Trim Z, Elegance Z, Hang Strip, Standard L Frm, Flat St, Flat Z	Z, Deco Z, Elegance Z, Std L Frm, Hang Strip, Flat Z
Sill Bottom Window	All Frames available with Sill bottom	All Frames available with Sill bottom
Sliders	Extended Frm	Extended Frm
French Doors	Slimline Frm, Standard Frm Standard Extended Frm, Flat Standard	Slimline Frm, Standard Frm Standard Extended Frm, Flat Standard
T-Post Situations	All Frames	All Frames
Molding around window, Protrusions, handles, and cranks may require the use of Frame Extensions	Frame Spacer (1"), Extended Frm (2")	Frame Spacer (1"), Extended Frm (2")

### IV. Louver Clearances


After selecting mount and frame type, always check for obstructions and protrusions that may interfere with the louver operation. Check the projection of the louver behind the mounting frame. Usually windows are recessed into the opening so a small projection on an outside mount or inside mount does not create a problem. If additional clearance is needed, a 1" frame spacer is available.

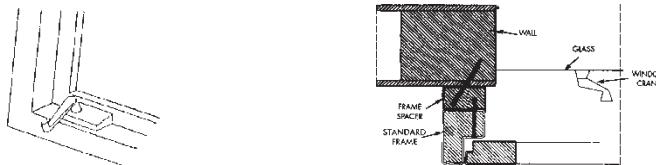

The diagrams and tables below show louver projections.




Amount ShutterSMART & AllView Louvers Project Beyond Frames			
	3" or 3 1/2" Louver	4" Louver	4 1/2" Louver
Std, Z, Trim Z Frames, Elegance	-	1/4"	1/2"
Designer Frame	-	1/2"	3/4"
Hanging Strip (in & out mount)	-	1/4"	1/2"



Amount MiraMonte / MiraMonte Premier Louvers Project Beyond Frames		
	3 1/2" Louver	4 1/2" Louver
L, Z, Designer, Deco Z, Elegance	1/2"	1"
Hanging Strip (outside mount)	1 1/4 "	1 3/4 "
Hanging Strip (inside mount)	-	1/2"

**Note:** The back tilt (offset) option adds an extra  $3/4"$  projection behind the panel. Rear FullView adds  $1/4"$ . Add this to the numbers in the tables above.


## Louver Projections for Hidden Tilt & AllView ( Window Depths Requirements )

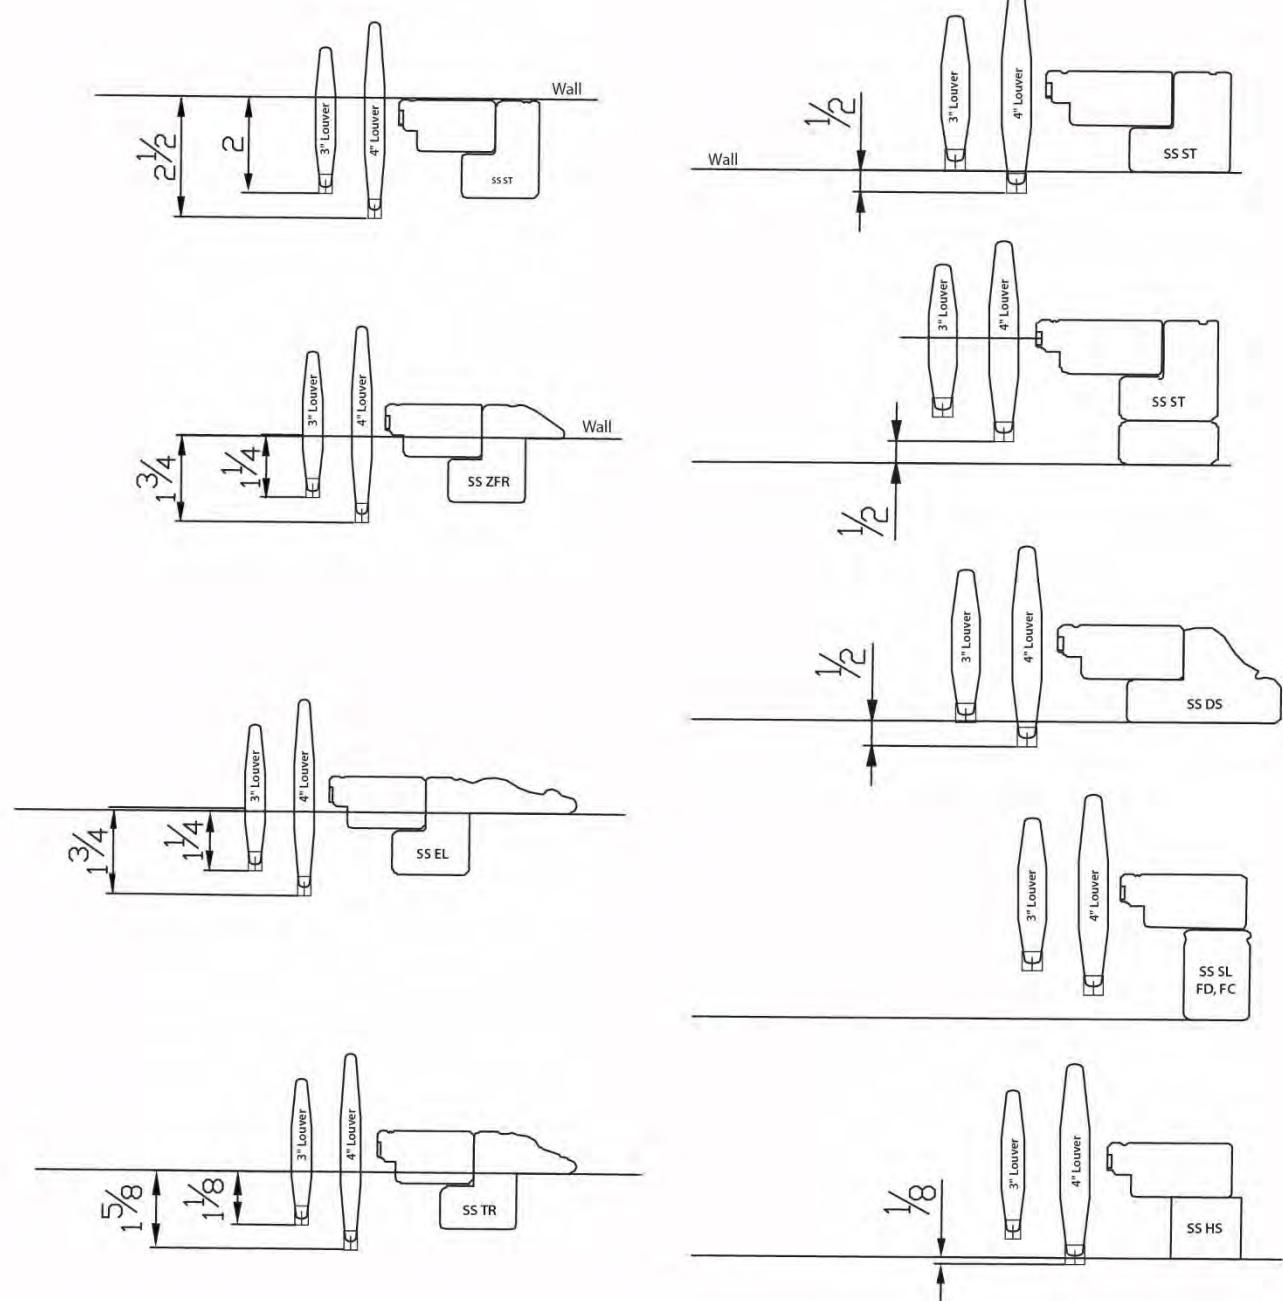

**Inside Mount Frames**

**Outside Mount Frames**


**Thermacore & Solidcore Louver Projections  
( Window Depths Requirements )**

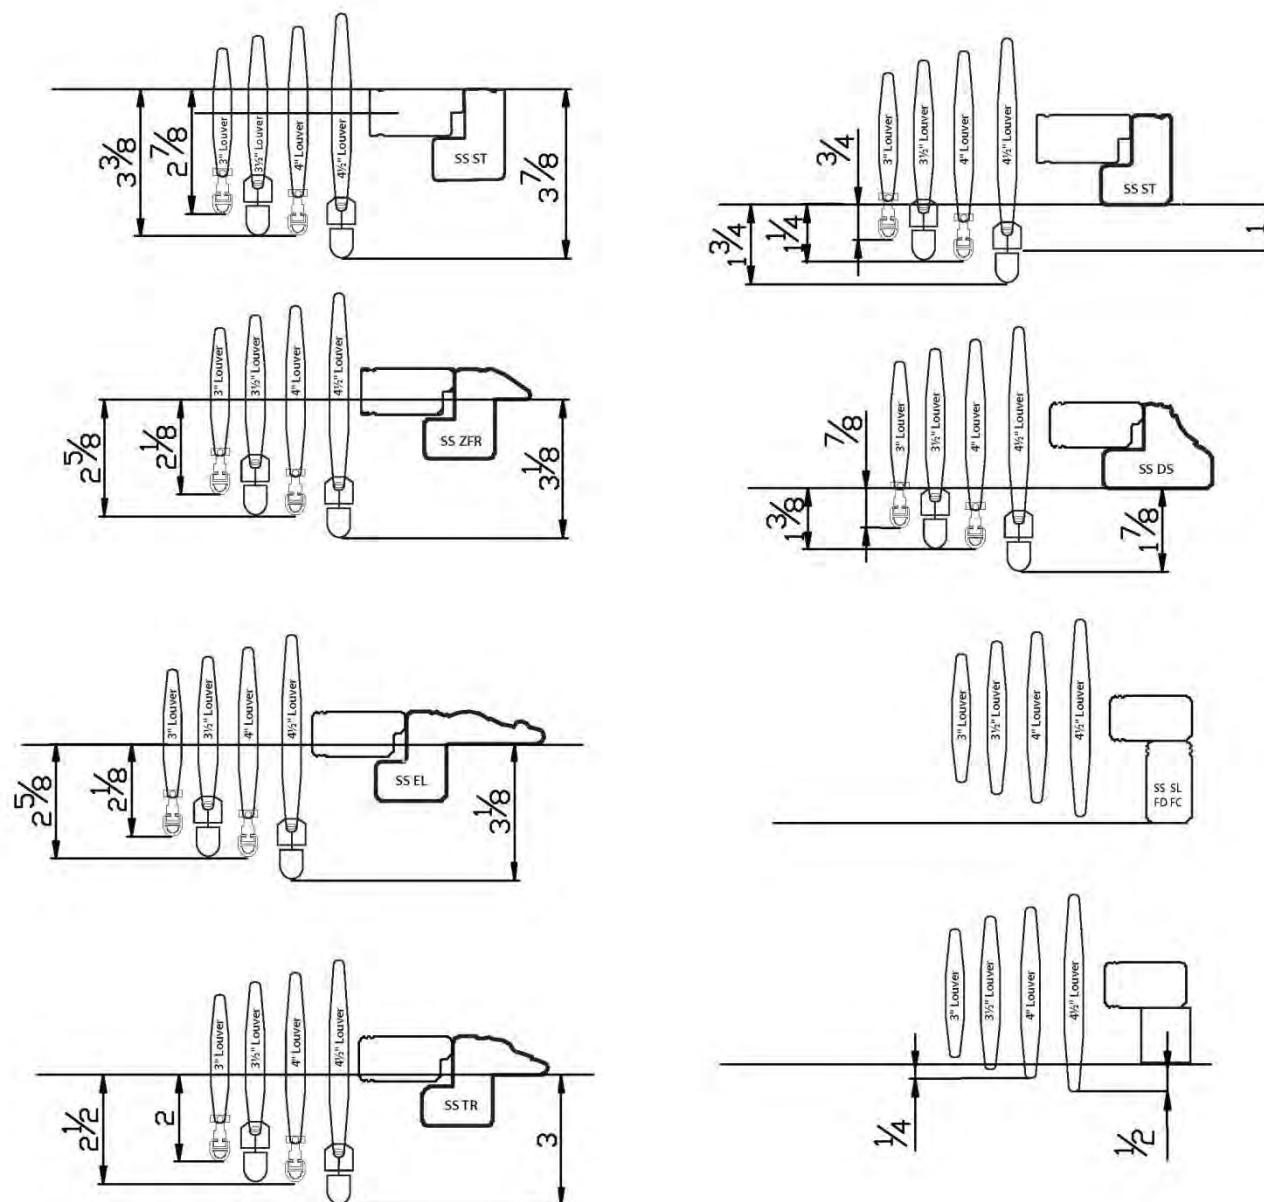


Inside Mount Frames

Outside Mount Frames

**Miramonte Louver Projections  
(Window Depths Requirements)**

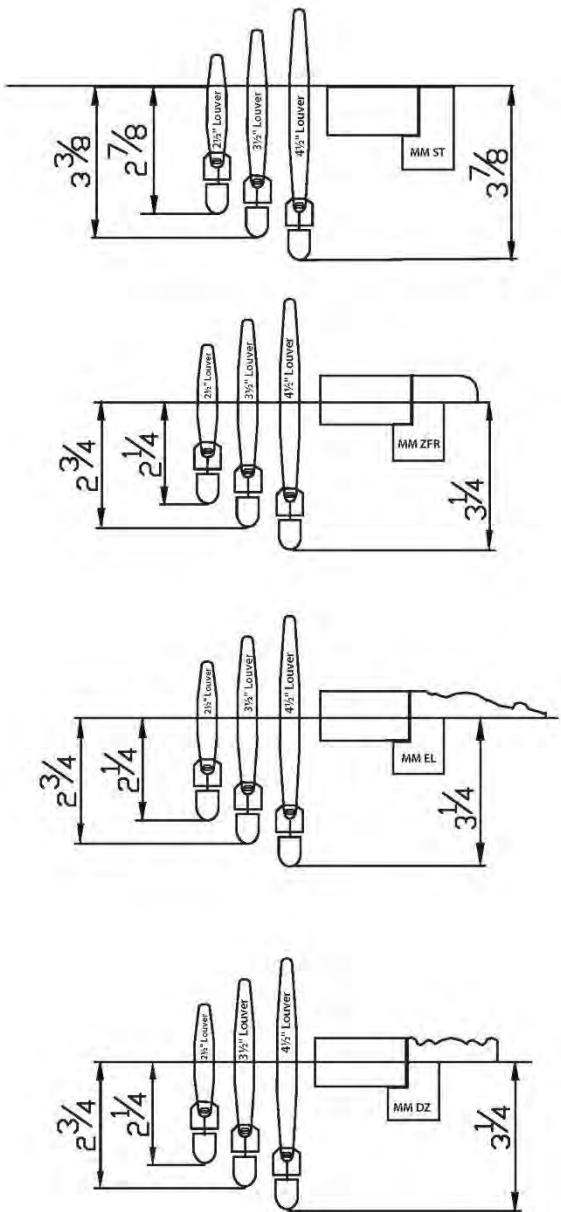

Inside Mount Frames

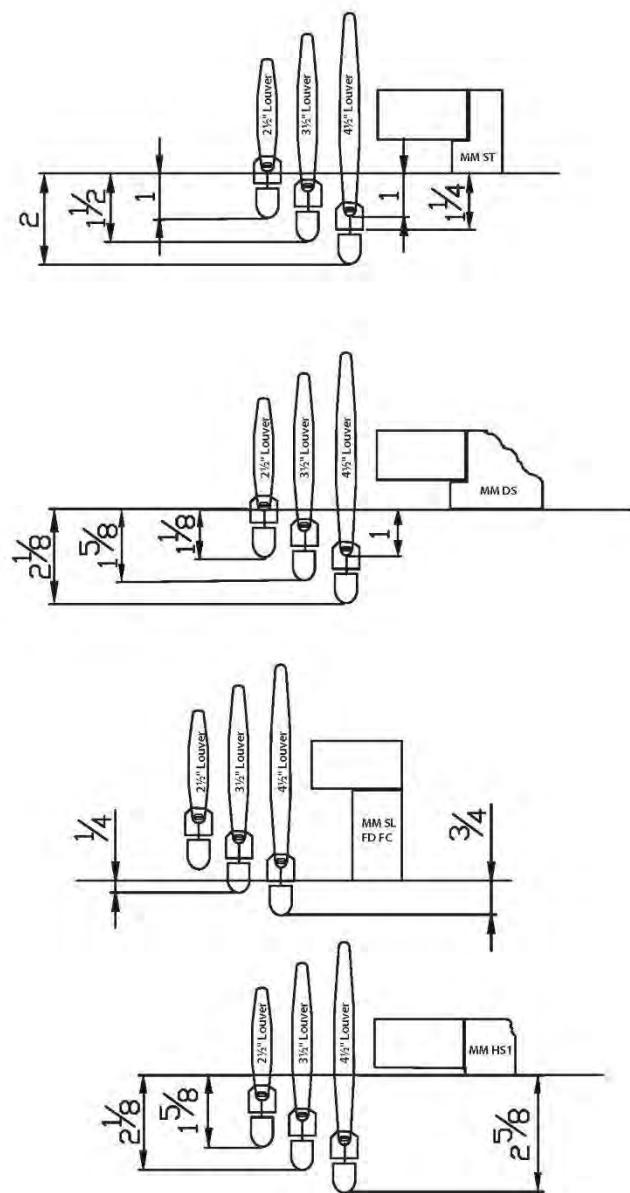


Outside Mount Frames

## V. Number of Frame Sides

Shutters can have frames on all 4 sides, on 3 sides, or on 2 sides. All our Z and Std Frames are interchangeable and can be mixed on any of the 4 frame sides of a shutter.

Following are our recommendations on each type of opening:

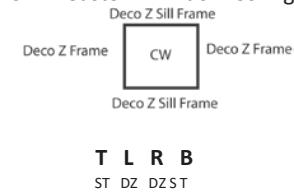Number of Frame Sides		
Mount Option	# of Frame Sides	Description
Outside or Inside	4W <input type="checkbox"/>	4-sided frame for window
Sill bottom, outside or inside Mount	4S <input type="checkbox"/>	4-sided frame for window w/ a sill carries a flat sill frame on bottom
	3W <input type="checkbox"/>	3-sided frame - no bottom frame; light stop supplied
Crank on bottom inside mount *	3W <input type="checkbox"/>	3-sided frame - no bottom frame; light stop supplied
Doors *	3D <input type="checkbox"/>	3-sided frame with $\frac{3}{4}$ " bottom clearance for doors
Café Style	2W <input type="checkbox"/>   <input type="checkbox"/>	2-sided frame for café style shutters used with Hanging Strips. We supply bottom/top light stops.
Sunburst Arches on top of shutter	4A <input type="checkbox"/>	4-sided frame with standard frame on top to accommodate a sunburst arch.
Arches, Bay windows, Windows reaching ceilings, and other custom situations	CW – Custom Window Config 	Custom frame configurations are available with all "L" and "Z" frames. You can request any "L" or "Z" frame on any side of the window. Flat Sill style frames can be used on any of the 4 sides.  Please specify Top, Left, Right and Bottom frames on order form under "CW" in special instructions.

\* 3W & 3D SolidCore Non-Slider shutters with no bottom frame on large windows will sag. We do not recommend this frame choice on larger shutters and if ordered, warranty will be void.

## VI. Panel Design

When designing panels, you need to consider panel fold direction, size limitations and divider rail requirements. Following is an outline of the most commonly used shutter and panel configurations with their max and min limitations. It is best to design with an even number of panels except for small windows that may require single panels.

### Panel Specifications


	Minimum	Maximum
Panel Width – Single panel (inches)		
ShutterSMART ThermaCore	8"	36"
ShutterSMART SolidCore	8"	34"
AllView	8"	27"
MiraMonte	8"	36"
Panel Width – Multiple panel (inches)		
ShutterSMART ThermaCore	8"	26"
ShutterSMART SolidCore	8"	24"
AllView	8"	22"
Miramonte	8"	26"
Panel Height (inches)	16"	Varies based on shutter type

### Shutter Size Limitations


#### Standard Folding Shutters

##### Single Panel

	Width	Height
ShutterSmart ThermaCore	36" + Frame	114" + Frame
ShutterSmart SolidCore	34" + Frame	114" + Frame
AllView	27" + Frame	86" + Frame
Miramonte/MM Premier	36" + Frame	114" + Frame

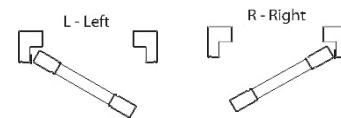


	Width	Height
ShutterSmart ThermaCore	72" + Frame	114" + Frame
ShutterSmart Woodcore	68" + Frame	114" + Frame
AllView	54" + Frame	86" + Frame
Miramonte/MM Premier	72" + Frame	114" + Frame

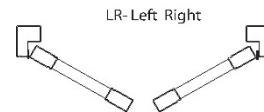


#### Bi-Fold Panels

	Width	Height
ShutterSmart ThermaCore	52" + Frame	114" + Frame
ShutterSmart SolidCore	48" + Frame	96" + Frame
AllView	44" + Frame	72" + Frame
Miramonte/MM Premier	52" + Frame	114" + Frame

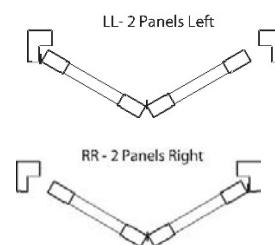

## Bi-Fold Panels (cont.)

	Width	Height
ShutterSmart ThermaCore	104" + Frame	114" + Frame
ShutterSmart SolidCore	96" + Frame	114" + Frame
AllView	88" * + Frame	72" + Frame
Miramonte/MM Premier	104" + Frame	114" + Frame

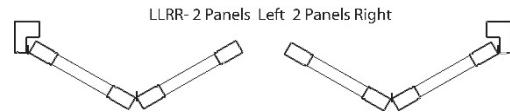


\*On AllView, we recommend using T-Posts on bifold panels wider than 72".

## French Door Shutter


Available in slimline or standard frames. Sizes below for Slimline frame.

	Width	Height
ShutterSmart ThermaCore	30" + Frame	114" + Frame
ShutterSmart SolidCore	30" + Frame	114" + Frame
AllView	29" + Frame	86" + Frame
Miramonte/MM Premier	30" + Frame	114" + Frame

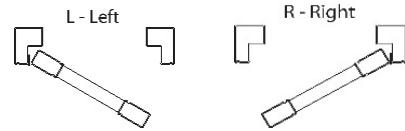

## Track Shutters

	Panel Width	Width	Height
AllView (4 panels)	27"	112"	96" + Frame
AllView (more panels)	27"	unlimited	96" + Frame

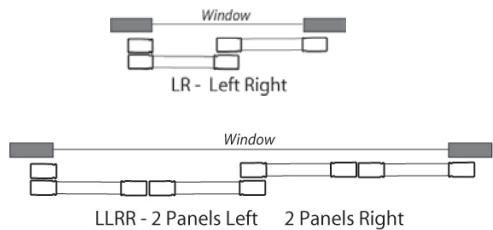


Track Shutters do not have side frames and will overlap wall.

Track Shutters over 62" require split tilter or divider rail.

## Bypass Sliding Shutters

	Panel Width	Shutter Width	Height
ShutterSmart ThermaCore	36"	Unlimited*	114" + Frame
ShutterSmart SolidCore	34"	Unlimited*	114" + Frame
AllView	27"	Unlimited*	96" + Frame
Miramonte/MM Premier	36"	Unlimited*	114" + Frame



\*On sliders beyond 142" wide, the top frame is spliced.

**T-Post Shutters** – Used for wider windows. Draw panel fold direction in the T-Post diagram on the bottom of order form OR call out the panel configuration like LTLRTR or LRTLRL.

## Divider Rails

The use of Dividing Rails makes the shutter stronger and allows more convenient light control. Following are the guidelines.

Divider Rail Requirements				
	ShutterSMART	AllView	MiraMonte Miramonte Premier	# of Dividing Rails
Panel Height	Over 72"	Over 62" *	Over 84"	1 rail required
	Over 96"	N/A	Over 102"	2 rails required

If you specify a dividing rail, we will automatically place it to evenly separate the panel. If you want a custom position, this can be specified by measuring from the bottom of the shutter to the midpoint of the rail.

\*AllView Track Shutters over 62" require either a split tilter or a divider rail.

**NOTE:** There is a tolerance on the position of the rails:

ShutterSMART/AllView	3" Louver Panels- rail position may vary up to 1 1/4" from specified position 4" Louver Panels- rail position may vary up to 1 3/4" from specified position 3 1/2" Louver Panels- rail position may vary up to 1 1/2" from specified position 4 1/2" Louver Panels- rail position may vary up to 2" from specified position
MiraMonte MM Premier	2 1/2" Louver Panels- rail position may vary up to 1" from specified position 3 1/2" Louver Panels- rail position may vary up to 1 1/2" from specified position 4 1/2" Louver Panels- rail position may vary up to 2" from specified position

## Split Tilters

The use of Split Tilters allows more convenient light control. When you specify a Split Tilter, they are automatically split to evenly separate the panel. If you want a custom position, this can be specified by measuring from the bottom of the Shutter to the midpoint of the louver. **NOTE:** Similar to divider rails, the position of the Split Tilter may vary up to 1 3/4" from specified position.

## Panel Tilt Options

Shutters are available with three tilt rod options

**Front Tilt** – The tilt rod is placed in the front of the shutter available in all shutters

**Back Tilt** – The tilt rod is placed in the rear hinge side of the shutter available in all shutters

**Rear FullView (SmartView)** – The tilt bar is placed in the rear side of the shutter at the edge of the louvers and nests into the stile body. It gives a full view through the shutters unhindered by a tilt rod. The **SmartView** patented technology is available in ShutterSMART and AllView. Rear FullView is also available in Miramonte and Miramonte Premier.


## ARCHES

Arches are available for ShutterSMART, Miramonte All Sunburst Arches, except custom shapes, ship in 6\* weeks. Arch top shutters ship in about 6-8 weeks. Maximum width on all arches is 96" frame tip to tip. Larger windows require 2 or more arches abutted to each other. The minimum width or height is 18" frame tip to tip. Maximum Height is 48" frame tip to tip.


### Sunburst Arches

#### Custom Frame Operable Arches


These operable and semi operable arches come in frames and colors that coordinate with the shutter frame and color. Note that frames and colors are not identical to shutter frame and Color but are a coordinated match that will "look" close. Differences are due to medium density fiberboard construction materials used. These arches are available in 6-8 weeks in Half circle, Eyebrow and Elongated shapes. These arches are not available in Miramonte Stained Wood shutters.

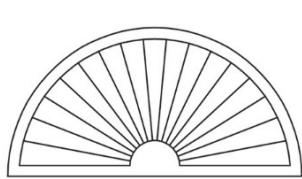


Sunburst Half Circle

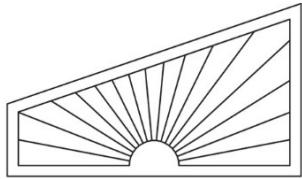

Rake Sunburst




Eyebrow Sunburst




Elongated Sunburst

#### Custom Frame Operable Arches with Separate Frame

Sunbursts are available with separate stand-alone frames that are hinged to the panel on the bottom. These arches take about 6\* weeks. These designs require a template or a detailed drawing. A comparison of the Sunburst arch with and without frame is shown below. Sunbursts with separate frames carry an extra surcharge in addition to the normal sunburst arch surcharge.

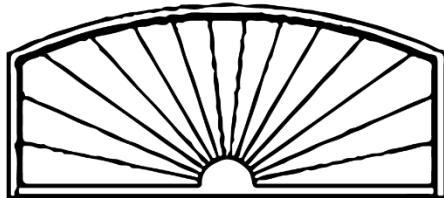


SUNBURST ARCH

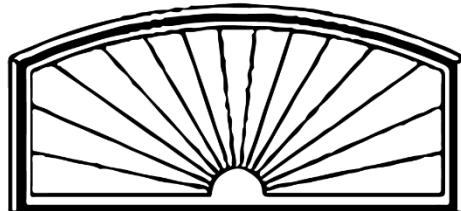

SUNBURST ARCH WITH SEPARATE FRAME


**Other Custom Shapes** – Other custom shapes are also available. These arches take about 6-8\* weeks. These designs require a template or a detailed drawing. The most common custom shapes are shown below. Tilt options of front or rear available. These custom shapes are also available with separate frames that are hinged to the panel. Maximum width on all arches is 96" frame tip to tip. Larger windows require 2 or more arches abutted to each other. The minimum width or height is 18" frame tip to tip. Maximum Height is 48". Note that in all custom shapes, louvers only open to a 90-degree angle.

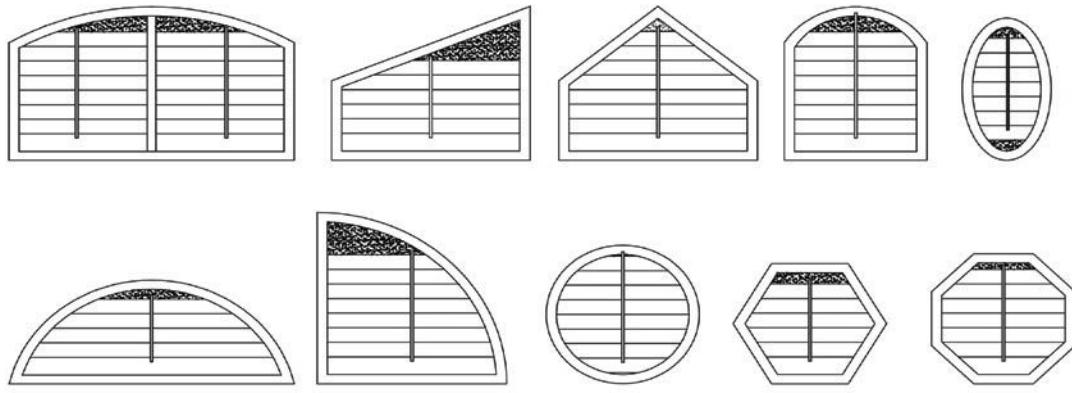

## Arch Top Shutters

### Arch Top Shutters

The arch top shutter has an arch built into the shutter panel(s). Louvers are operable and this shutter is available in all frames except the extended frame. *The contour of the arch frame meets the side frame legs with a small decorative sill plate.* Note that the arch part of the panel and frames is built with wood and engineered wood and color matched with the shutter. Arch top panels take about 6\* weeks to produce. This arch carries a surcharge. Note that in all arch tops, louvers only open to a 90-degree angle.

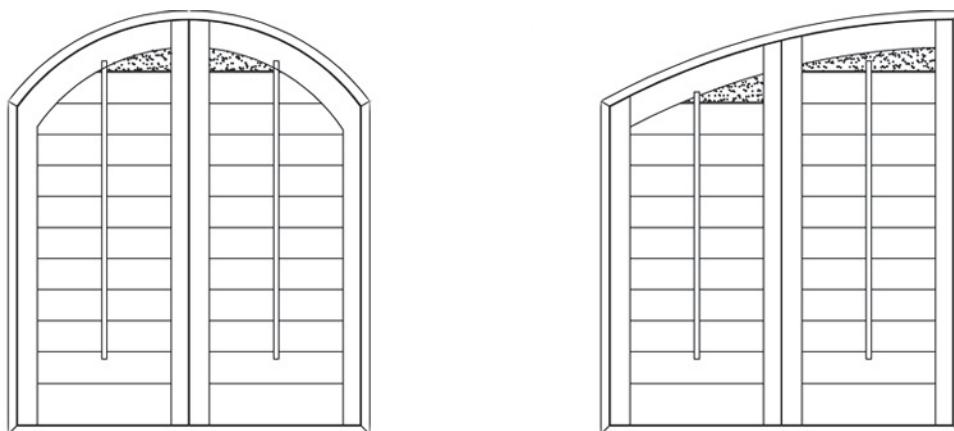

\*all lead times are approximates, estimated ship dates are confirmed on sales order confirmations and may vary

## Measuring Arches

### Sunburst Arches -

Sunburst arches face mount around the window opening. Sunburst arches have a separate order form that should be used when ordering. There are two ways to measure for these arches.

#### Two Measuring Methods


There are 2 methods for measuring arch windows:

1. Window Size Measuring
2. Frame Size Measuring

#### I. Window Size Measuring

The factory makes all the arch frame additions around opening.  
Ensure proper mounting clearances.

The window size measures both the width and height of the window from the inside of the opening as shown below. All arches are face mounted around the opening and the factory will make the appropriate additions to the opening size based on the frame type selected.

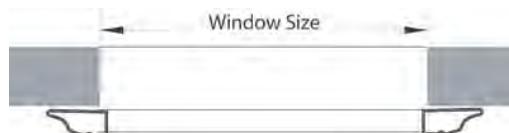


The table below shows the frame additions the factory will make to the window size.

Factory Frame Additions for Arches			
ShutterSMART	MiraMonte & MM Premier		
Standard L Frame (Outside Mount only)	+4"	Standard L. (Outside Mount only)	+2 1/2"
Designer Frame (Outside Mount only)	+5"	Designer (Outside Mount only)	+4 1/4"
Z Frame	+7/8"	Z Frame	+1 1/4"
Trim Z Frame	+2 1/4"	Deco Z Frame	+2 1/4"
Elegance Z Frame	+4 1/4"	Elegance Z Frame	+4 1/4"



#### II. Frame Size Measuring

The factory makes no additions to this frame tip to tip size.  
Ensure proper mounting clearances.

Frame size measures both the width and height of the shutter from frame tip to tip. This is used only when the arch frame size needs to be different than the standard factory additions and requires a match to a frame size shutter measurement.

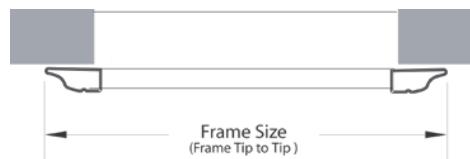

**Arch Top Shutters-** Arch top shutters are ordered on the shutter order form. Mark "AR" under shutter type and design the shutter. Measure as you would a normal shutter. Then draw a schematic of the arch top shutter and note the specific required heights (H1, H2 and H) under the special instructions section of the order form.

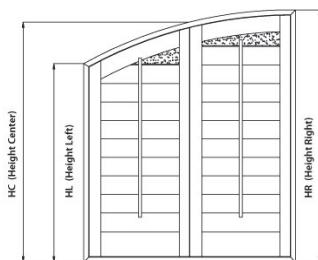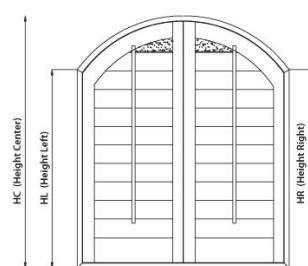

# INSTALLATION

**Installation** - Installing Shutters is easy. The most important part of installation is designing and measuring the shutters properly. Follow the instructions below for a fast and easy install.


**Note:** for training videos on installation, go to [www.shuttersmart.com](http://www.shuttersmart.com) and login to the dealer section

**Tools required** - Power Drill - Counter Sink Drill - Bit Set #8 - #2 Phillips Bit - Level


**What's Included** - Shutters come pre hinged and pre framed from the factory to ensure perfect operation.

## 2 Mounting Options -

### Outside Mount

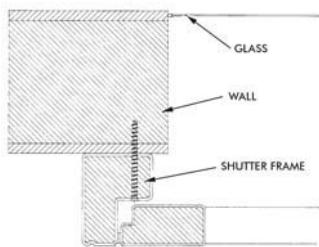


### Inside Mount

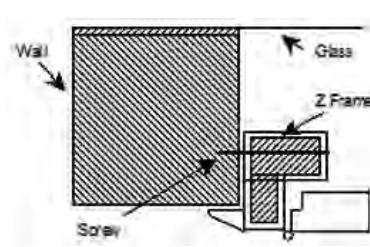


**(1)** Before placing the shutter in the window, Assemble Frame, Predrill 4 installation holes 4" from the top and bottom corners of hinged frame legs.

**(2)** Position Frame around windows top corner, then Drill screw at top hole of hinged frame. (Note that the base of the bottom hinge is closest to frame corner.)

**(3)** Level frame and Attach screw at top right hole of hinged frame.

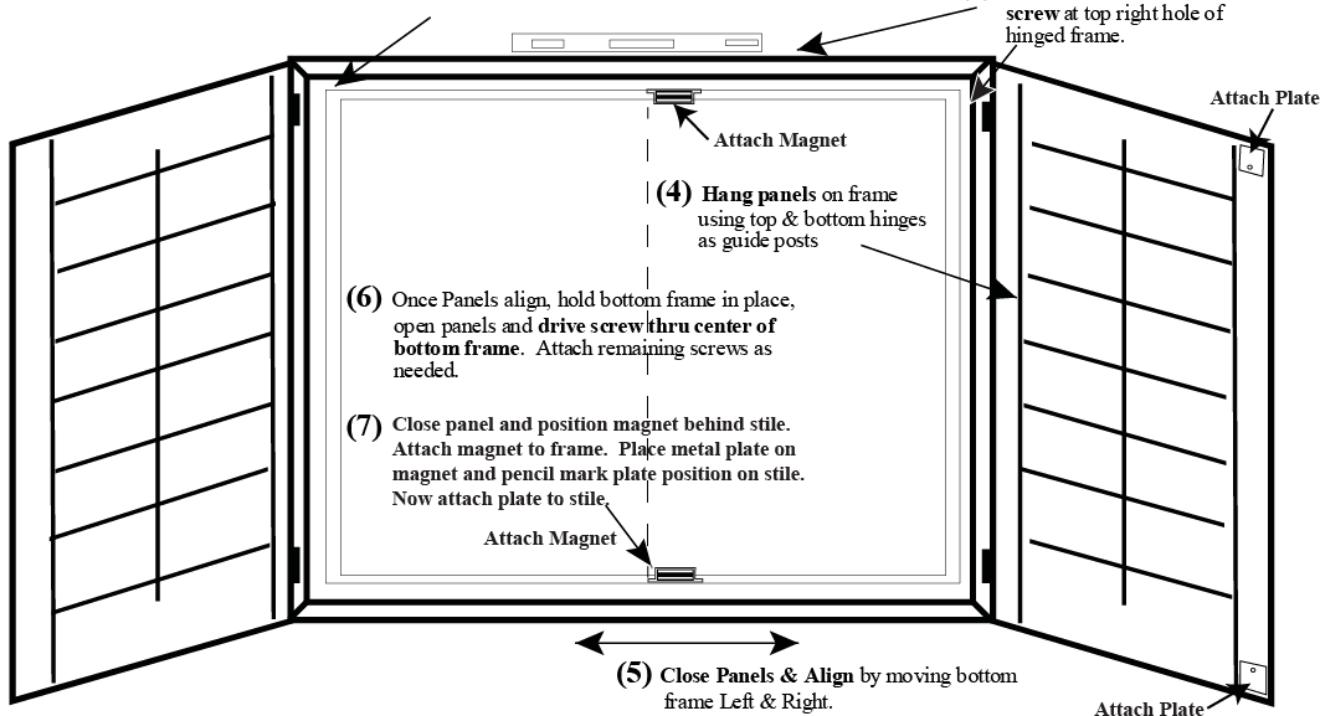


## Exploded View of Shutter

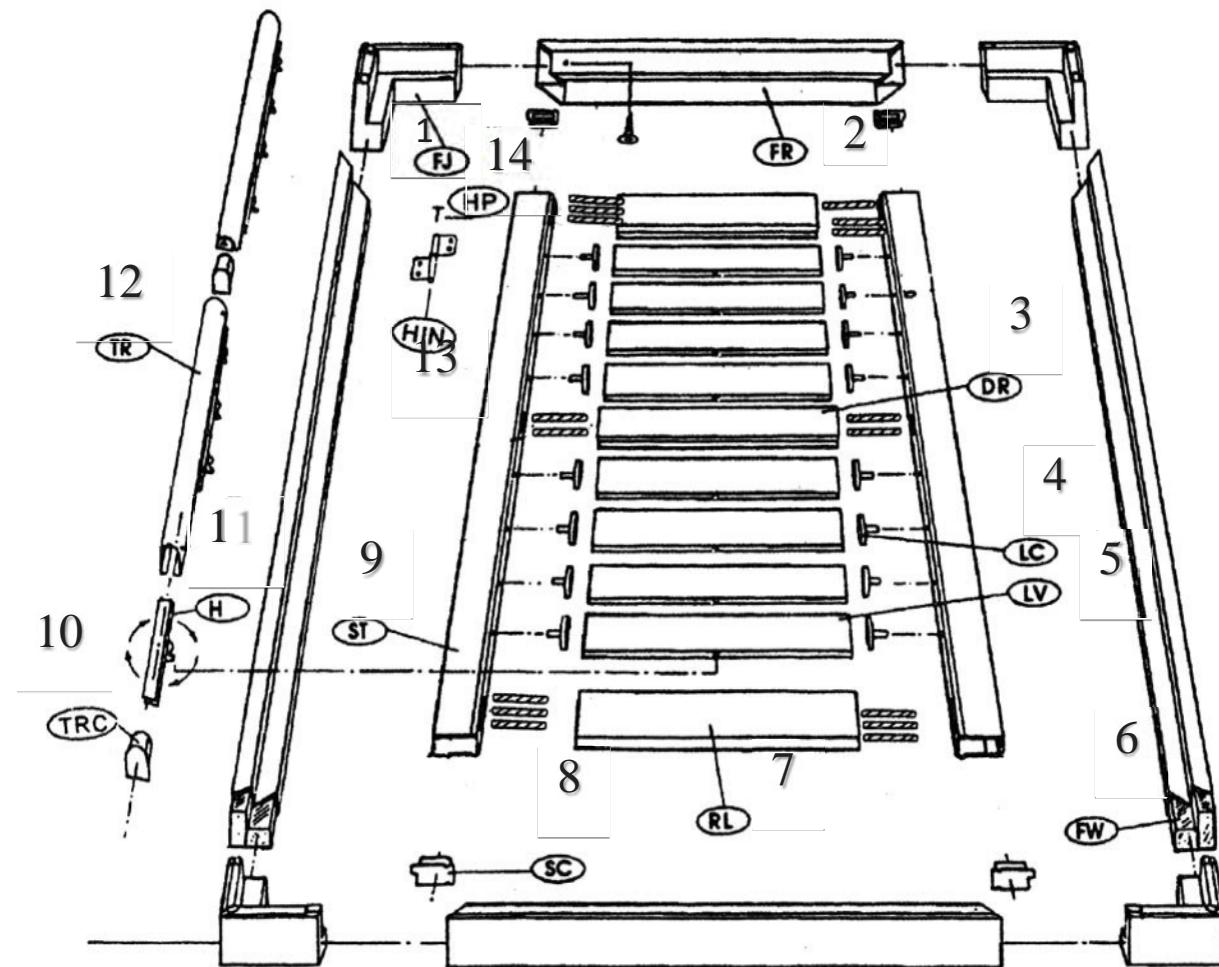

No.	Code	Description
1	FJ	Frame Joint
2	FR	Frame
3	DR	Divider Rail
4	LC	Louver Cap
5	LV	Louver
6	FW	Frame Wood
7	RL	Rail
8	SC	Stile Cap
9	ST	Stile
10	TRC	Tilt Rod Cap
11	H	Hook
12	TR	Tilt Rod
13	HN	Hinge
14	HP	Hinge Pin

	Code	Description
A	DOW	Dowel
B	RW	Rail Wood
C	SC	Stile Cap
D	SW	Stile Wood

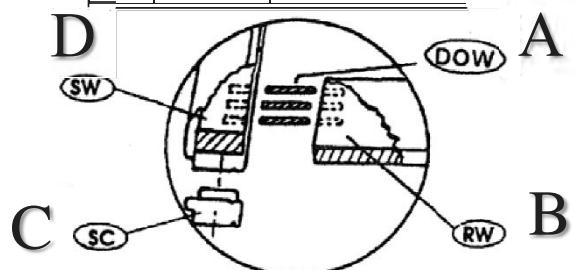



## PROBLEM / RESOLUTION FORM PARTS / REPAIRS / REMAKES / WARRANTY

Date: \_\_\_\_\_

Dealer Name: \_\_\_\_\_

P.O. / SideMark: \_\_\_\_\_

Order No. \_\_\_\_\_ Order Date: \_\_\_\_\_

Product:       AllView       ShutterSMART (Thermacore)       SolidCore     Miramonte     Miramonte Premier

Line No. \_\_\_\_\_ Size: \_\_\_\_\_ Color: \_\_\_\_\_

Line No. \_\_\_\_\_ Size: \_\_\_\_\_ Color: \_\_\_\_\_

Line No. \_\_\_\_\_ Size: \_\_\_\_\_ Color: \_\_\_\_\_

Problem with shutter: (Describe)

---

---

---

---

If damaged, where is the damage located on shutter (please email photos together with this form)?

---

---

---

---

How did damage occur?

---

---

---

---

What is needed to correct problem?

---

---

---

---



CALIFORNIA DEPARTMENT OF FORESTRY and FIRE PROTECTION  
OFFICE OF THE STATE FIRE MARSHAL

## REGISTERED FLAME RESISTANT PRODUCT

**Product:**

SHUTTER SMART

**Registration No.**

F-06801

**Product Marketed By:**

US POLYMERS INC.  
1057 S. VAIL AVENUE  
MONTEBELLO, CA 90640

This product meets the minimum requirements of flame resistance established by the California State Fire Marshal for products identified in Section 13115, California Health and Safety Code.

The scope of the approved use of this product is provided in the current edition of the **CALIFORNIA APPROVED LIST OF FLAME RETARDANT CHEMICALS AND FABRICS, GENERAL AND LIMITED APPLICATIONS CONCERNS** published by the California State Fire Marshal.

A handwritten signature in black ink, appearing to read "D. J. [Signature]".

Deputy State Fire Marshal

FR-8



## COMPANY POLICIES

### Ordering

Orders are [accepted online at shuttersmart.com](http://shuttersmart.com), by email at [orders@uspolymersinc.com](mailto:orders@uspolymersinc.com) or by fax at 323-727-6891.

All customers must inspect merchandise upon receipt and record any freight damage on the Proof of Delivery. Any damage needs to be reported to USP along with the POD. Hold onto the damaged merchandise so that the trucking companies can verify the claim and pick up the damaged goods. Obvious damage must be reported within 7 days of receipt. Concealed damage must be reported within 10 days. Pictures must be submitted for damage claims. Repairs and damage remakes will be processed as soon as the extent of the damages and the needed resolution are clearly understood.

### Shipping

Orders in California are shipped with our trucks. For out of state shutter shipments, to ensure prompt delivery, we use Package Delivery Services or common carrier standard ground transport curbside delivery. There is no additional charge for delivery to authorized locations throughout the continental US. However, additional charges will be incurred if special services are needed (i.e., Inside delivery, redelivery, re-consignment, or if storage is required because dealer cannot be contacted). For shipments to Alaska, Hawaii, and outside of the conterminous states, dealer will be responsible for freight cost and other charges. We will make reasonable efforts to meet scheduled want date, but we cannot guarantee to meet these dates. We will not be liable for any costs or losses resulting from delivery dates. All orders will ship to primary business address per account. Drop shipments to changing residential locations will carry a residential delivery surcharge.

### Claims & Credit issues

All claims on product must be made within 10 days of invoice date. Claims made beyond 10 days of invoice date will not be honored. All claims or credit requests should be made with customer service. A credit memo will be issued upon approval.

### Freight Damage

All customers should inspect merchandise upon receipt and record any freight damage on the Proof of Delivery. Any damage needs to be reported to USP along with Proof of Delivery. Hold on to any merchandise that is damaged so that the trucking companies can verify the claim. If a damaged shipment is received and no notes are made on the Proof of Delivery stating damage, customers will be solely responsible for merchandise.

Customer needs to pursue directly with freight company any freight damage on freight collect shipments.

### Rework

An RGA is required for all rework goods. Obtain this from customer service. Please note that it is the customers full responsibility to deliver the product back to USP in good shape. Poor packaging causing scratches and damaged panels will be charged to the customer.

### Remakes

If a shutter is deemed to be out of the written specifications on a purchase order form and our specification guidelines, at its sole option USP will remake or repair the shutter. We reserve the right to bring back all shutters that are claimed to be out of specifications for inspection, repair, or remake.

### Warranty Issues

Any claims not filed within 20 days will fall under the guidelines of our warranty statement. Refer to the warranty page in your manual for more details.



## COMPANY POLICIES

### **Color Variations**

Even though strict quality standards are maintained to minimize color variations, we recommend that you not attempt exact color matches from your wood shutter sample panels. Colors vary from dye lot to lot. For best color consistency, order shutters within the same room at the same time. We cannot guarantee exact color matching between orders and will not warranty this.

### **Orders cannot be canceled.**

Since orders are custom made, orders cannot be canceled once placed.

### **Credit Terms & Payment**

US Polymers credit terms are CBD. Credit terms are only extended to customers with excellent credit history. Issues regarding payments should be addressed through customer service.

### **Contact us.**

For any questions, contact our customer service at **800-737-4569** or email: [dealersupport@uspolymersinc.com](mailto:dealersupport@uspolymersinc.com).



## LIFETIME LIMITED WARRANTY

ShutterSMART, a division of U.S. Polymers Inc. (USP), warrants to the original buyer, only, of USP Shutter Products that if installed, used and maintained according to USP's written instructions, the product will be free from manufacturing defects for the reasonable lifetime (fifteen years) of the Product, effective from the date of purchase by the original buyer, from an authorized USP dealer or retailer. No salesperson, dealer, retailer nor any representative of USP has the authority to modify this Warranty in any way, either verbally or in writing. No other warranties are made except as set forth herein, and said Warranty is limited by the following terms and conditions:

This Warranty shall remain in effect only if the Product has been installed, maintained, cleaned, treated and used correctly. This Warranty shall not apply if the Product has been damaged due to alteration, accident, misuse, misapplication, improper installation, abuse, normal wear and tear, exposure to the elements, improper maintenance or handling, fire, flood, or other Acts of God.

### **LIMITED WARRANTY LIMITATIONS**

1 **Product use:** This Limited Warranty applies only in respect to Products that are used strictly for the purpose in which they were designed, manufactured, sold and intended. THIS LIMITED WARRANTY WILL NOT COVER ANY PRODUCTS WHICH ARE NOT PURCHASED FROM AN AUTHORIZED USP DEALER OR RETAILER WHO ACQUIRED THE PRODUCTS DIRECTLY FROM USP.

2 **Warranty Limitations:** USP's liability is Limited solely and exclusively to repair or replacement, at USP's option, of all or any part of the defective Product. USP reserves the right to ask for products to be shipped back for inspection and repairs. Under no circumstances shall USP be liable for consequential or incidental damages resulting from the defective Product. This includes but is not limited to costs of removal and reinstallation, disassembly and/or reassembly, damage or injury to other property, labor costs for any purpose, or any other expense.

3 **LIMITATIONS ON LIABILITY.** THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE FACE HEREOF, EXPRESSLY OR IMPLIED, WRITTEN OR ORAL, INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF merchantability or fitness for a particular purpose, whether or not arising from any trade usage or course of viewing, with respect to the products of manufacturer. In no event shall manufacturer be liable for loss of profits, indirect, special or consequential damages arising out of any product covered by this warranty, or incidental damages, including without limitation loss of use, loss of time or inconvenience, or other expenses. In no event shall manufacturer's liability herein exceed the cost of the product. Some states do not allow the exclusion of limitation of incidental damages, so the above limitations or exclusions may not apply to you.

4 **Replacement Parts or Repairs:** USP reserves the right to discontinue or change any of its Shutter Products as currently manufactured, at any time. If USP determines to make a replacement under the terms of this Limited Warranty and exact replacements are not available, USP reserves the right to substitute a part or parts of equal quality at its sole option.

### **EXCLUSIONS FROM LIMITED WARRANTY COVERAGE**

The following are excluded from coverage under this Limited Warranty:

1. Exposure to air pollutants and normal atmosphere conditions may cause vinyl surfaces to gradually suffer accumulation of surface dirt and stains. These are normal occurrences and are not covered under USP's Limited Warranty.
2. Any defect, malfunction or failure to perform, which has occurred because of unreasonable use, improper application or failure to perform reasonable or necessary maintenance.
3. Any damage to the Shutters or components of the Shutters caused by settlement or structural defects of the building in which they are installed.
4. Any damage caused by wind, hail, lightning, rain, or other Acts of God, intentional acts, accidents, negligence, exposure to harmful chemicals or pollutants.



## LIFETIME LIMITED WARRANTY

5. Any damage or defect caused by any person, licensed or not, who, after the Product's manufacture, handled, transported or installed the USP Shutter Product, regardless of that person's relationship to USP.
6. Any Shutter which has been repaired or modified or attempted to have been repaired or modified by any person other than a duly authorized representative of USP.
7. Any shutter that has been exposed to excessive sources of heat.
8. Any Shutter Product that is manufactured outside of USP's normal, standard factory specifications. This shall include, but not be limited to, custom manufactured Shutter Products for unusually shaped, or abnormally large applications.

In the event that any part or provision of this limited warranty shall conflict with any present or future law, statue, ordinance, regulation or ruling, the latter shall prevail; provided, however, that the part or provision of this agreement which is effected shall be curtailed and limited only to the extent necessary to bring it within the requirements of law, and all other parts and provisions of this limited warranty shall remain in full force and effect. For service under this Limited Warranty, please contact U. S. Polymers, Inc., 1057 S. Vail Ave., Montebello, CA 90640,

telephone (323) 728-3023. Please have available the proof of purchase and the purchase date and location from an authorized USP dealer or retailer, in addition to a detailed description of the problem. All warranty requests must be submitted in writing. USP shall not be liable for shipping costs for product inspection, service or repair, and is not liable for damages or loss occurring in shipping.

### **Maintenance and Care Instructions**

ShutterSMART's Polyclad Hardwood shutter is a very low maintenance product. Like any home furniture, we recommend you use care when handling your shutters. An occasional dusting or cleaning should keep your shutters looking like new for years to come. When cleaning, use a moist towel that will remove all dust. Soap and water or other nonabrasive household cleaners will work well. Do not use abrasive liquids or acetone-based cleaning solutions.

For proper cleaning, open shutter panel and close the louvers upward. Clean both sides of the shutter using a moist cloth. Then tilt the louvers downward and clean the shutters in this position to ensure both sides are completely clean. An occasional cleaning of the surface will keep dirt accumulation and any staining off the product.

Congratulations on your purchase of our award winning Polyclad Hardwood shutters. We hope you enjoy your shutters for years to come.

# ALLVIEW

## LIMITED LIFETIME WARRANTY

U.S. Polymers Inc. (USP) warrants to the original buyer, only, of AllView Products that if installed, used and maintained according to USP's written instructions, the product will be free from manufacturing defects for the reasonable lifetime (fifteen years) of the Product, effective from the date of purchase by the original buyer, from an authorized USP dealer or retailer. All metal components are warranted for 3 years. No salesperson, dealer, retailer nor any representative of USP has the authority to modify this Warranty in any way, either verbally or in writing. No other warranties are made except as set forth herein, and said Warranty is limited by the following terms and conditions:

This Warranty shall remain in effect only if the Product has been installed, maintained, cleaned, treated and used correctly. This Warranty shall not apply if the Product has been damaged due to alteration, accident, misuse, misapplication, improper installation, abuse, normal wear and tear, exposure to the elements, improper maintenance or handling, fire, flood, or other Acts of God.

### LIMITED WARRANTY LIMITATIONS

**1 Product use:** This Limited Warranty applies only in respect to Products that are used strictly for the purpose in which they were designed, manufactured, sold and intended.

**2 Warranty Limitations:** USP's liability is Limited solely and exclusively to repair or replacement, at USP's option, of all or any part of the defective Product. USP reserves the right to ask for products to be shipped back for inspection and repairs. Under no circumstances shall USP be liable for consequential or incidental damages resulting from the defective Product. This includes but is not limited to costs of removal and reinstallation, disassembly and/or reassembly, damage or injury to other property, labor costs for any purpose, or any other expense.

**3 LIMITATIONS ON LIABILITY.** THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE FACE HEREOF, EXPRESSLY, OR IMPLIED, WRITTEN OR ORAL, INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF merchantability or fitness for a particular purpose, whether or not arising from any trade usage or course of viewing, with respect to the products of manufacturer. In no event shall manufacturer be liable for loss of profits, indirect, special or consequential damages arising out of any product covered by this warranty, or incidental damages, including without limitation loss of use, loss of time or inconvenience, or other expenses. In no event shall manufacturer's liability herein exceed the cost of the product. Some states do not allow the exclusion of limitation of incidental damages, so the above limitations or exclusions may not apply to you.

**For Replacement Parts or Repairs:** USP reserves the right to discontinue or change any of its products as currently manufactured, at any time. If USP determines to make a replacement under the terms of this Limited Warranty and exact replacements are not available, USP reserves the right to substitute a part or parts of equal quality at its sole option.

### EXCLUSIONS FROM LIMITED WARRANTY COVERAGE

The following are excluded from coverage under this Limited Warranty:

1. Exposure to air pollutants and normal atmosphere conditions may cause vinyl surfaces to gradually suffer accumulation of surface dirt and stains. These are normal occurrences and are not covered under USP's Limited Warranty.
2. Any defect, malfunction or failure to perform, which has occurred because of unreasonable use, improper application or failure to perform reasonable or necessary maintenance.
3. Any damage to the product or components of the product caused by settlement or structural defects of the building in which they are installed.
4. Any damage caused by wind, hail, lightning, rain, or other Acts of God, intentional acts, accidents, negligence, exposure to harmful chemicals or pollutants.
5. Any damage or defect caused by any person, licensed or not, who, after the Product's manufacture, handled, transported or installed the Product, regardless of that person's relationship to USP.

# ALLVIEW

## LIMITED LIFETIME WARRANTY

6. Any Product which has been repaired or modified or attempted to have been repaired or modified by any person other than a duly authorized representative of USP.

7. Any Product that has been exposed to excessive sources of heat.

8. Any Product that is manufactured outside of USP's normal, standard factory specifications. This shall include, but not be limited to, custom manufactured Products for unusually shaped, or abnormally large applications.

In the event that any part or provision of this limited warranty shall conflict with any present or future law, statue, ordinance, regulation or ruling, the latter shall prevail; provided, however, that the part or provision of this agreement which is effected shall be curtailed and limited only to the extent necessary to bring it within the requirements of law, and all other parts and provisions of this limited warranty shall remain in full force and effect.

For service under this Limited Warranty, please contact U. S. Polymers, Inc., 1057 S. Vail Ave., Montebello, CA 90640, telephone (323) 728-3023. Please have available the proof of purchase and the purchase date and location from an authorized USP dealer or retailer, in addition to a detailed description of the problem. All warranty requests must be submitted in writing. USP shall not be liable for shipping costs for Product inspection, service or repair, and is not liable for damages or loss occurring in shipping.

### **Maintenance and Care Instructions**

AllView is a low maintenance product. Like any home furniture, we recommend you use care when handling AllView. An occasional dusting or cleaning should keep your shutters looking like new for years to come. When cleaning, use a moist towel that will remove all dust. Soap and water or other non-abrasive household cleaners will work well. Do not use abrasive liquids or acetone-based cleaning solutions.

For proper cleaning, open shutter panel and close the louvers upward. Clean both sides of the shutter using a moist cloth. Then tilt the louvers downward and clean the panel in this position to ensure both sides are completely clean. An occasional cleaning of the surface will keep dirt accumulation and any staining off the product.

Congratulations on your purchase.

## LIMITED LIFETIME WARRANTY

All Wood Shutter Products made by U.S. Polymers, Inc. (USP) come with a limited lifetime warranty on material defects and workmanship for as long as the original purchaser owns the shutters, provided that such products were properly installed and maintained. Any resale or other transfer of the product and/or materials voids this warranty.

Miramonte painted wood shutters and Miramonte Premier wood shutters come with a 3-year limited warranty on color fastness of paints. This warranty does not cover any conditions or damages resulting from exposure to elements, excessive heat or humidity, fading or discoloration over time. Wood is a natural product and may have characteristic differences in the grain, pattern variation in the profile and paint effect. This is considered an enhancement to the beauty of natural wood and is not a material defect. No salesperson, dealer, retailer nor any representative of USP has the authority to modify this Warranty in any way, either verbally or in writing. No other warranties are made except as set forth herein, and said Warranty is limited by the following terms and conditions:

This Warranty shall remain in effect only if the Product has been installed, maintained, cleaned, treated and used correctly. This Warranty shall not apply if the Product has been damaged due to alteration, accident, misuse, misapplication, improper installation, abuse, normal wear and tear, exposure to the elements, improper maintenance or handling, fire, flood, or other Acts of God.

### **LIMITED WARRANTY LIMITATIONS**

5 **Product use:** This Limited Warranty applies only in respect to Products that are used strictly for the purpose in which they were designed, manufactured, sold and intended. This limited warranty will not cover any products which are not purchased from an authorized usp dealer or retailer who acquired the products directly from usp.

6 **Warranty Limitations:** USP's liability is Limited solely and exclusively to repair or replacement, at USP's option, of all or any part of the defective Product. USP reserves the right to ask for products to be shipped back for inspection and repairs. Under no circumstances shall USP be liable for consequential or incidental damages resulting from the defective Product. This includes but is not limited to costs of removal and reinstallation, disassembly and/or reassembly, damage or injury to other property, labor costs for any purpose, or any other expense.

7 **LIMITATIONS ON LIABILITY.** THERE ARE NO WARRANTIES WHICH EXTEND BEYOND THE FACE HEREOF, EXPRESSLY OR IMPLIED, WRITTEN OR ORAL, INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF merchantability or fitness for a particular purpose, whether or not arising from any trade usage or course of viewing, with respect to the products of manufacturer. In no event shall manufacturer be liable for loss of profits, indirect, special or consequential damages arising out of any product covered by this warranty, or incidental damages, including without limitation loss of use, loss of time or inconvenience, or other expenses. In no event shall manufacturer's liability herein exceed the cost of the product. Some states do not allow the exclusion of limitation of incidental damages, so the above limitations or exclusions may not apply to you.

8 **Replacement Parts or Repairs:** USP reserves the right to discontinue or change any of its Shutter Products as currently manufactured, at any time. If USP determines to make a replacement under the terms of this Limited Warranty and exact replacements are not available, USP reserves the right to substitute a part or parts of equal quality at its sole option.

### **EXCLUSIONS FROM LIMITED WARRANTY COVERAGE**

The following are excluded from coverage under this Limited Warranty:

9. Any conditions or damages resulting from exposure to elements, excessive heat or humidity, fading or discoloration overtime
10. Any defect, malfunction or failure to perform, which has occurred because of unreasonable use, improper application or failure to perform reasonable or necessary maintenance.
11. Any damage to the Shutters or components of the Shutters caused by settlement or structural defects of the building in which they are installed.
12. Any damage caused by wind, hail, lightning, rain, or other Acts of God, intentional acts, accidents, negligence, exposure to harmful chemicals or pollutants.
13. Any damage or defect caused by any person, licensed or not, who, after the Product's manufacture, handled, transported or installed the USP Shutter Product, regardless of that person's relationship to USP.
14. Any Shutter which has been repaired or modified or attempted to have been repaired or modified by any person other than a duly authorized representative of USP.

## **LIMITED LIFETIME WARRANTY**

15. Any shutter that has been exposed to excessive sources of heat.
16. Any Shutter Product that is manufactured outside of USP's normal, standard factory specifications. This shall include, but not be limited to, custom manufactured Shutter Products for unusually shaped, or abnormally large applications.

In the event that any part or provision of this limited warranty shall conflict with any present or future law, statue, ordinance, regulation or ruling, the latter shall prevail; provided, however, that the part or provision of this agreement which is effected shall be curtailed and limited only to the extent necessary to bring it within the requirements of law, and all other parts and provisions of this limited warranty shall remain in full force and effect.

For service under this Limited Warranty, please contact U. S. Polymers, Inc., 1057 S. Vail Ave., Montebello, CA 90640, telephone (323) 728-3023. Please have available the proof of purchase and the purchase date and location from an authorized USP dealer or retailer, in addition to a detailed description of the problem. All warranty requests must be submitted in writing. USP shall not be liable for shipping costs for Product inspection, service or repair, and is not liable for damages or loss occurring in shipping.

### **Maintenance and Care Instructions for Miramonte Wood Shutters**

Like any home furniture, we recommend you use care when handling your Miramonte wood shutters. Regular dusting and cleaning should be done. When cleaning, dust or use a slightly moist cloth. Do not use cleaning solutions or abrasive liquids.

For proper cleaning, open shutter panel and close the louvers upward. Clean both sides of the shutter using a slightly moist cloth. Then tilt the louvers downward and clean the shutters in this position to ensure both sides are completely clean. An occasional cleaning of the surface will keep dirt accumulation and any staining off the product.

Congratulations on your purchase and we hope you enjoy your shutters for years to come.

**Thank You for your  
Business & Partnership**



**THE SMART CHOICE**